



RoHS

Needle diameter (针径):

|         |      |
|---------|------|
| NO.1    |      |
| PART NO |      |
| D       | 0.60 |
| N       |      |

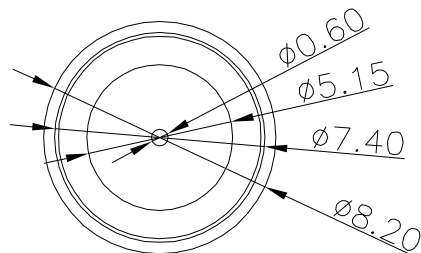

## SCHEMATIC



## SPECIFICATIONS:

## 1. ELECTRICAL CHARACTERISTICS:

1-1. RATING: 20V, 7A Min.

1-2. CONTACT RESISTANCE:

50 MILLIOHMS Max. FOR INITIAL,

80 MILLIOHMS Max. AFTER 5000 CYCLES.

1-3. INSULATION RESISTANCE: 100 MEGAOHMS Min.

BY 500V DC AFTER 1 MINUTE.

1-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V



RMS AFTER 1 MINUTE.

## 2. MECHANICAL CHARACTERISTICS:

2-1. INSERTION FORCE : 0.3~3.0 KGF(2.94~29.4N)

2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF(2.94~29.4N)

3. LIFE TEST: 5,000 CYCLES MIN.

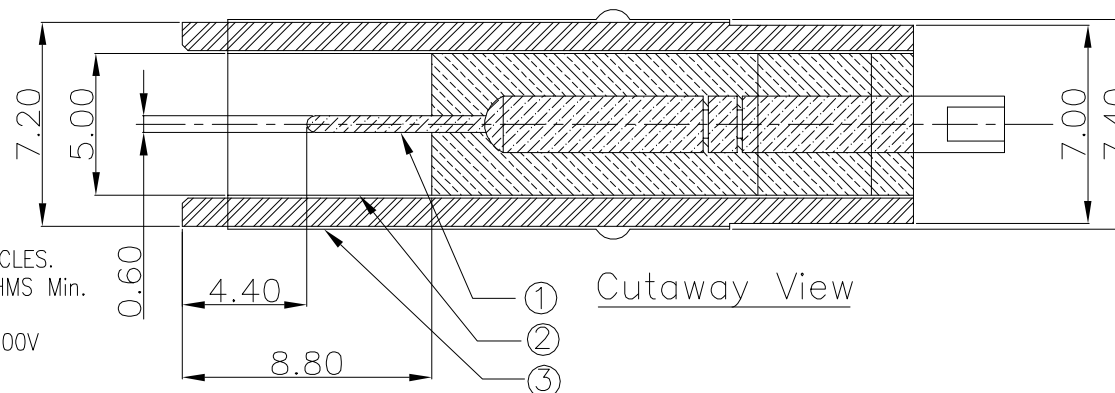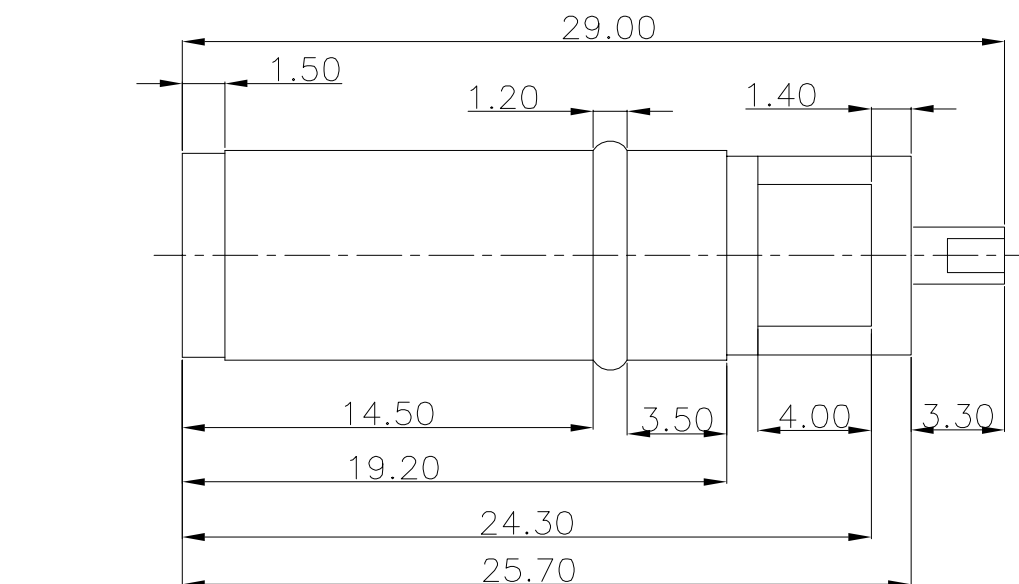

Cutaway View

public errand (公差) :  $\pm 0.2\text{mm}$  unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

|           |              |                        |                                              |          |          |         |            |
|-----------|--------------|------------------------|----------------------------------------------|----------|----------|---------|------------|
| PART NAME |              | DC JACK                |                                              | DRAWING  | G.L CHEN | DWG.No. | LCZY       |
| PART NO.  |              | DC-192G                |                                              | CHECK    | Z.LIU    | REV.    | A1         |
|           | UNIT :<br>mm | TOLERANCE<br>OTHERWISE | UP TO 5<br>ABOVE 5 ~ 30<br>ABOVE 30<br>ANGLE | APPROVAL | SCALE    | DATE    | DC-09-2019 |
|           |              |                        |                                              |          |          | PAGE    | 1 OF 1     |

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

DC-192G-□