

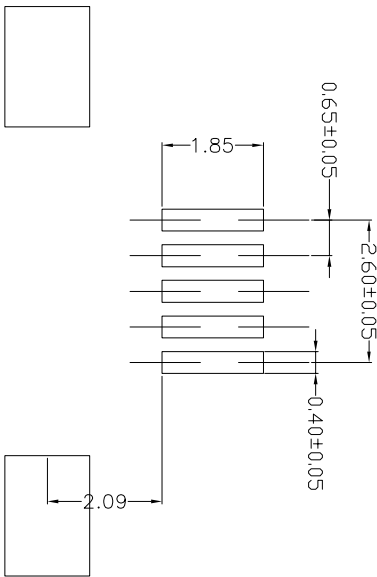
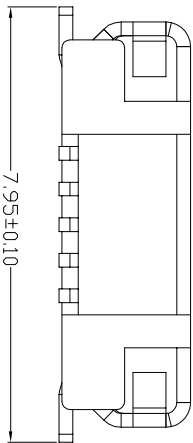
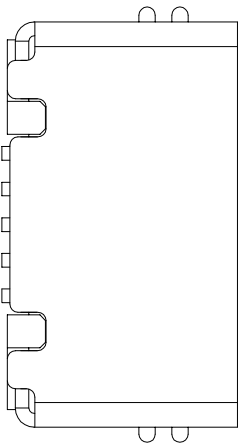


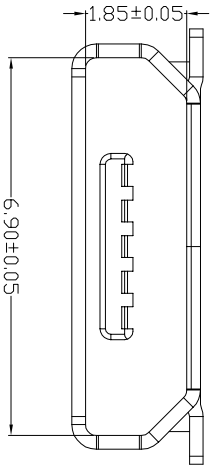

PCB LAYOUT

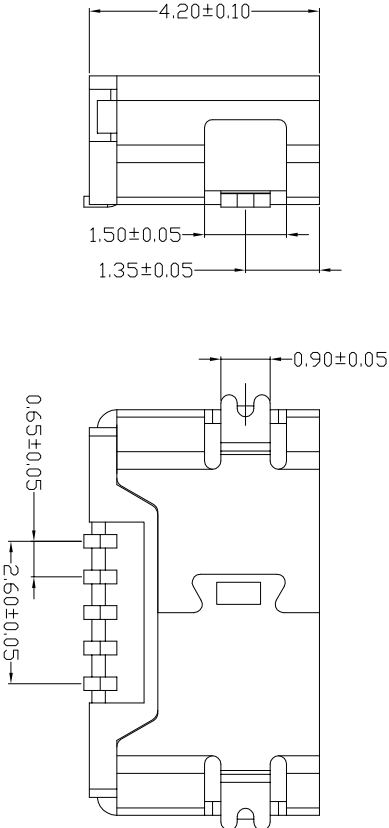

- 备注：
1. 产品规格：
- 1-1. 插入力：35N MAX.
- 1-2. 拔出力：10N MIN. INITIAL 8-20N AFTER 10000 CYCLES
- 1-3. 额定电流：1.0A
- 1-4. 额定电压：30V
- 1-5. 耐久性：10000 CYCLES MIN.
- 1-6. 耐电压：100V AC MIN.
- 1-7. 接触阻抗：30mΩ MAX. INITIAL：40mΩ MAX AFTER 10000 CYCLES
- 1-8. 绝缘电阻：100MΩ MIN
- 1-9. 工作温度：-30° TO +80°
2. 材质：
2. 1胶芯：LCP UL94V-0
2. 2端子：C2680R-H, 镍底，镀金1μ”
2. 3外壳：C2680R-H, 表面镀镍100μ
3. 所用材质须符合RoHS要求
4. 重点尺寸标识”▲“符号

③	Shell	—	1	Phosphor Bronze	Sn Plated	—
②	Contact	—	5	Phosphor Bronze	Au Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L		2019.09.3		
CHECKED		TITLE:		USB CONNECTOR		
APPROVALS		PART NO.		U-F-M5SW-W-1		
TOLERANCES ARE		30~以上 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE	UNIT: mm	SCALE: 1:1
ECN NO.		REV.	DATE.	DESCRIPTION.		PROJ:
NEW		A		CHANGE.		SHEET 1 OF 1