

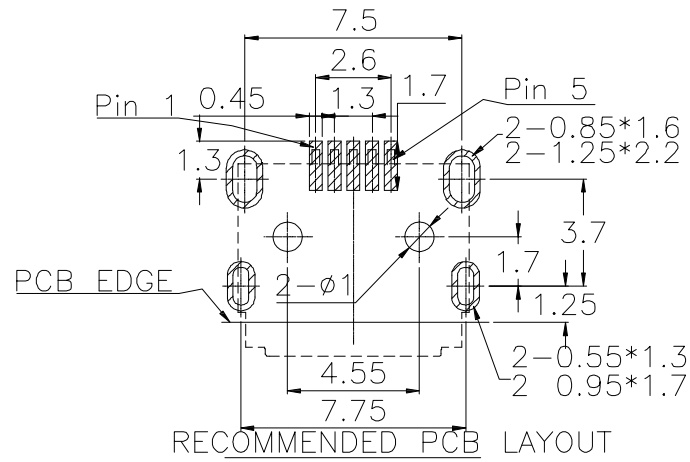
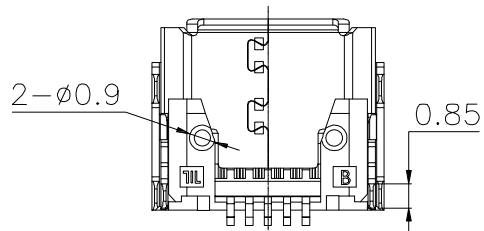
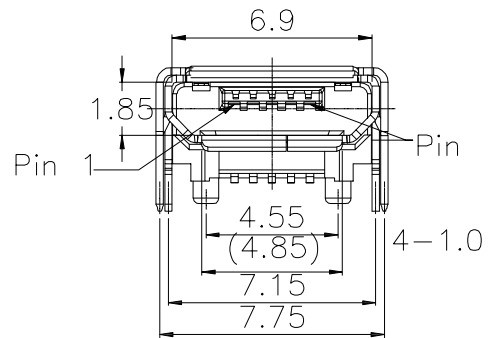
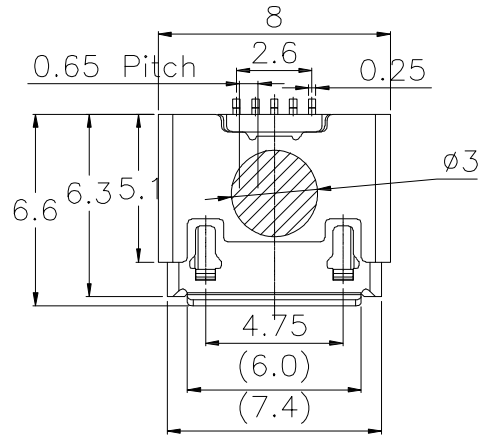



ROHS

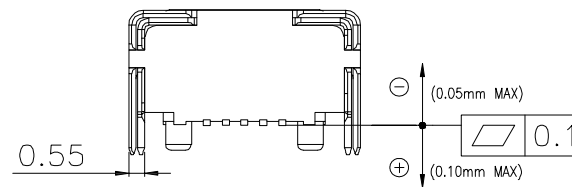

Toleranc : ± 0.1 (TOP VIEW)

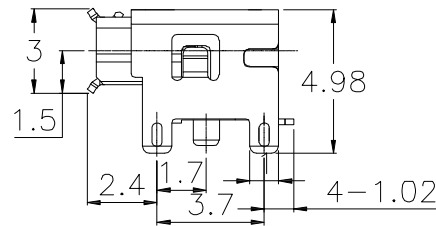

(coplanarity 0.1mm MAX.
Before, during and after Reflow)

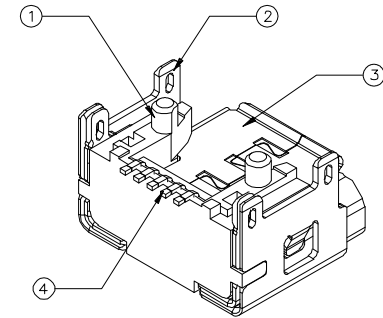

Notes:

Specifications:

- Current rating: 1 A Max.
Dielectric
withstanding:voltage: 100V(AC) for 1 min.
3. Contact resistance: 50mΩ
Max.
4. Insulation resistance: 100MΩ
Min.
5. Total mating force: 3.57 Kg
Max.
6. Total unmating force: 1.0 Kg
Min.0.81~2.05 Kg Min.after
- 10000 insertion/extraction cycles
7. Temperature range:
-30°C~+80°C

④	Contact	——	5	Copper Alloy	Au Plated	——
③	Shell	——	1	SUS	Ni Plated	——
②	Cover	——	1	SUS	Ni Plated	——
①	Housing	——	1	LCP	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.09.3				
CHECKED			TITLE:	USB CONNECTOR		
APPROVALS			PART NO.	U-F-M5DS-Y-11		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
		±2°	DRAWING NO.	———	SHEET 1 OF 1	

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			