

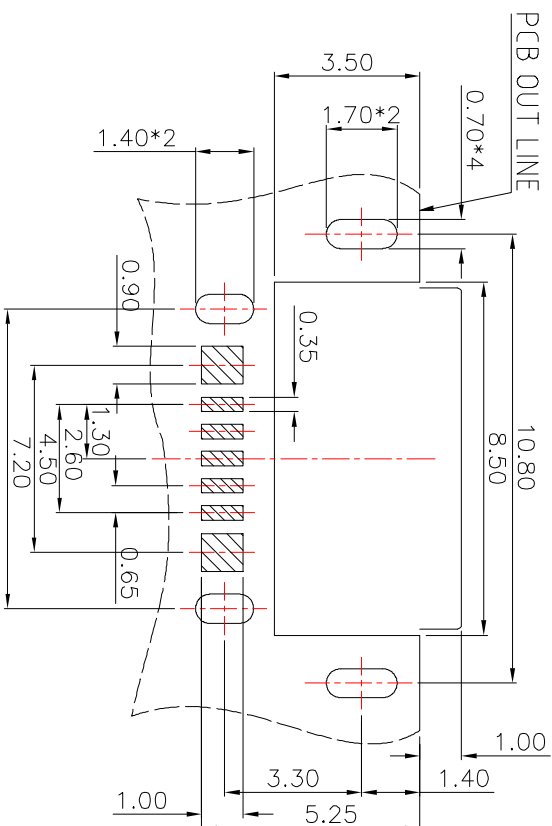
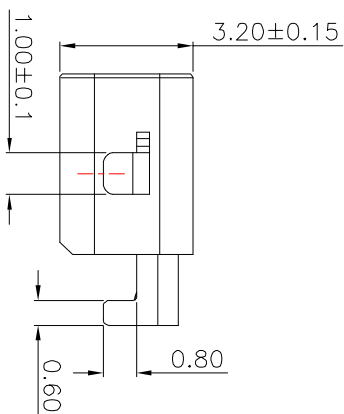
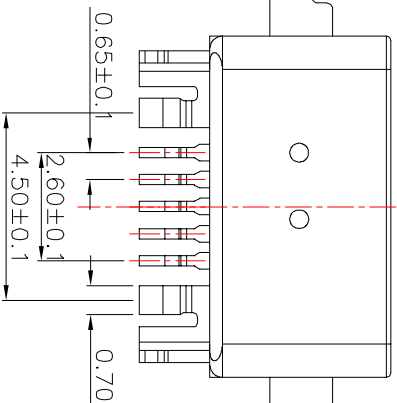
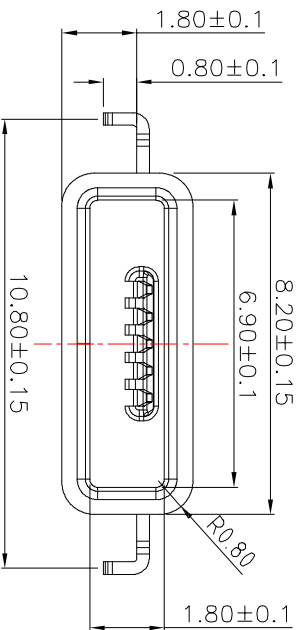
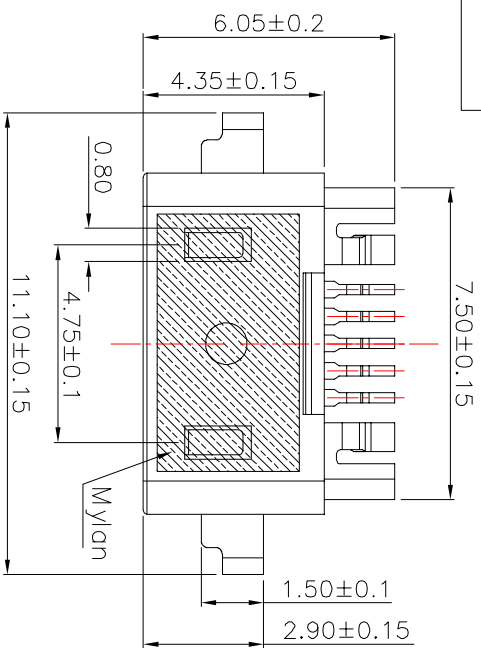


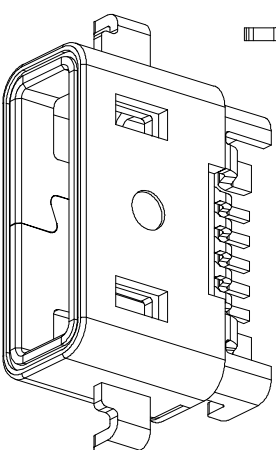

P.C.B LAYOUT

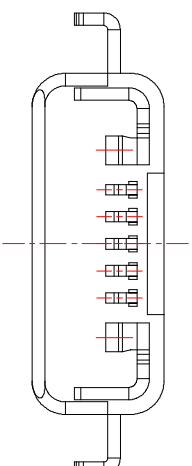

- Specifications
1. Rating : AC\DC 30V 1.0A
 2. Dielectric withstanding:250V(AC) for 1min
 3. Contact Resistance: 30mΩMax
 4. Insulation Resistance: 500MΩ Min
 5. Operating Temperature Range: -20℃+60℃
 6. Operating Life : 5,000Cycles
 7. IP Rating: IP64

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
30~12.7			±0.30	ANGLE		
10~30			±0.25	UNIT: mm		
5~10			±0.20	SCALE: 1:1		
~ 5			±0.15	DRAWING NO.		
			±2°	SHEET 1 OF 1		

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
③	Shell	—	1	Brass	Ni Plated	—
②	Contact	—	5	Phosphor Bronze	Au Plated	—
①	Housing	—	1	Nylon	Black	—

APPROVALS	DATE
DRAWN	2019.09.3
CHECKED	
APPROVALS	

TITLE:	USB CONNECTOR
PART NO.	U-E-M5DD-W-1
SCALE:	1:1
DRAWING NO.	