

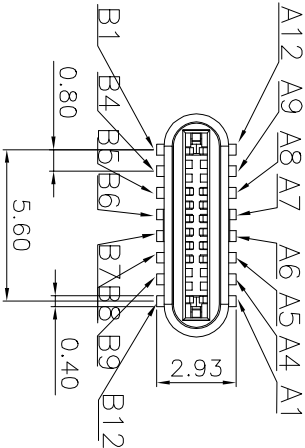
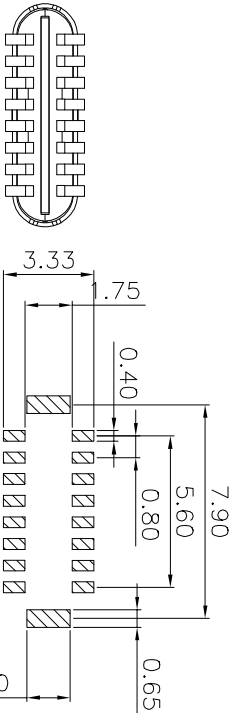





GND			Vbus		D-	D+		Vbus		GND	
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

- 主要特性:
- 1 额定电流: 0.5A
 - 2 接触阻抗: 30mΩ MAX
 - 3 绝缘阻抗: 100MΩ MIN 250V DC
 - 4 耐压测试: 250V AC
 - 5 沾锡性: 温度250±5℃, 时间5±0.5s
 - 6 整体插入力: 3.57kgf MAX
 - 整体拔出力: 1.02kgf MIN

4	PLASTIC	HIGH TEMP	Black/WHITE	UL 94V-0
3	Latch	STAINLESS STEEL	—	Ni Plated
2	TERMINAL	COPPER ALLOY	—	Gold Plated
1	SHELL	STAINLESS STEEL	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12		TITLE: USB CONNECTOR			
CHECKED				PART NO. TYPE-C-31-G-06			
APPROVALS				SCALE: 1:1			
TOLERANCES ARE		30~以上 10~30 5~10 ~5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	PROJ:	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.				
	A		NEW				
			CHANGE				
			CHECK.				
			APPRO.				