
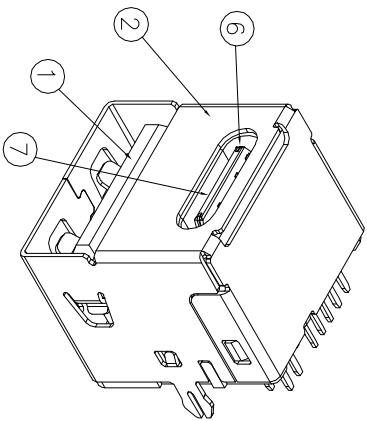
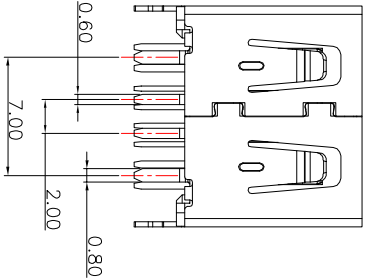
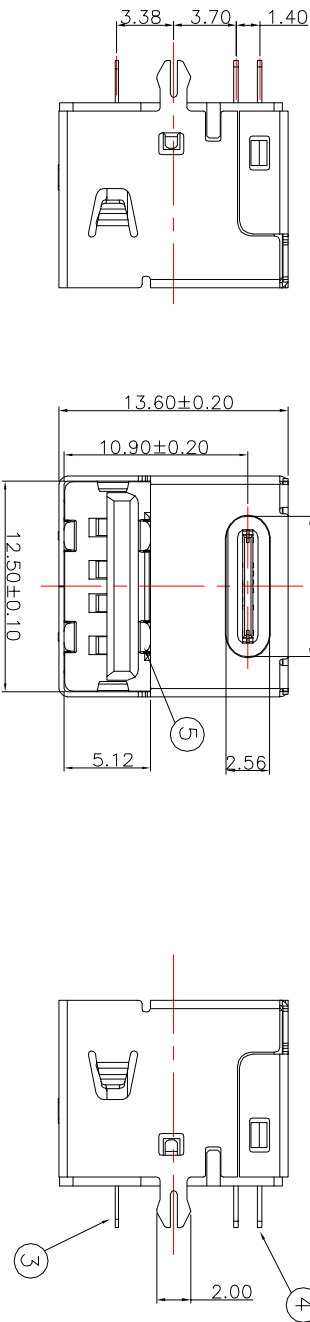


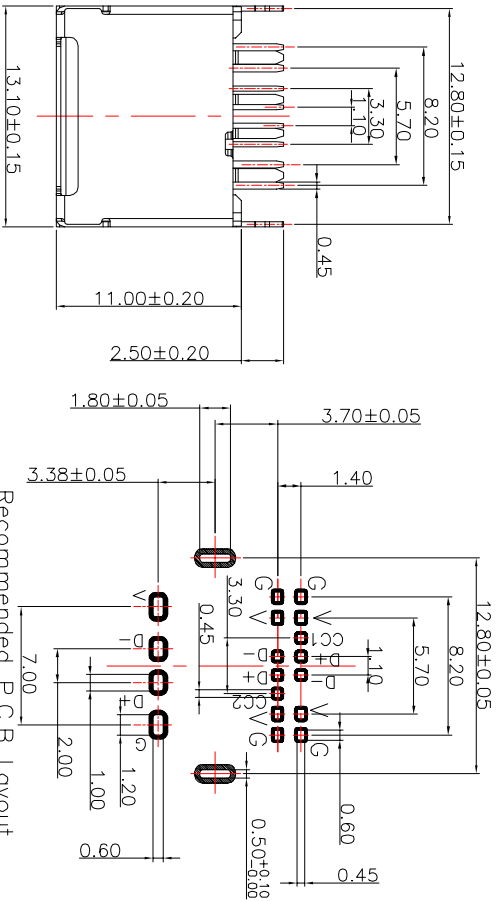

1. CURRENT RATING:
a:TYPE-C: 8.0A MAX
b:USB2.0: 5.0A MAX
2. Withstanding Voltage: 100V AC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N (1~1000次)
8. DURABILITY: 10,000 CYCLES

7	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
6	CENTER PIECE	STAINLESS STEEL	—	NO Plated
5	TYPE C TERMINAL	COPPER ALLOY	—	Gold Plated
4	CLIP	SEE NOTE	—	Ni Plated
3	USB TERMINAL	COPPER ALLOY	—	Gold Plated
2	SHELL	SEE NOTE	—	Ni Plated
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12				
CHECKED						
APPROVALS						
TOLERANCES ARE		30~12.7 ±0.30	±0.30	ANGLE	PART NO.	TYPE-C-31-M-10
		10~30 ±0.25	±0.25		UNIT: mm	SCALE: 1:1
		5~10 ±0.20	±0.20	±2°	DRAWING NO.	PROJ: 1 OF 1
		~ 5 ±0.15	±0.15			
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			