

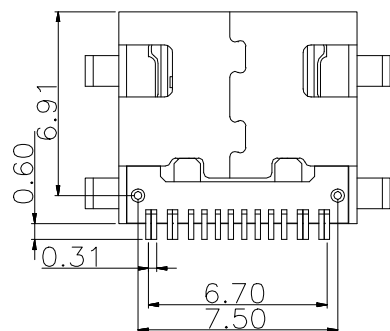
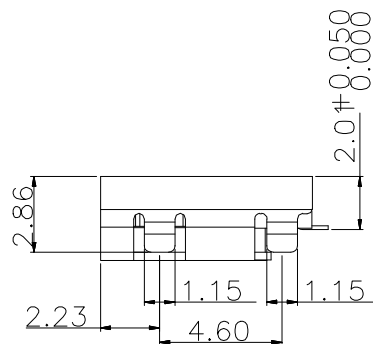
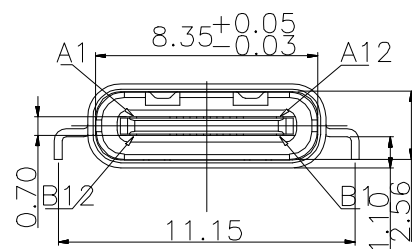
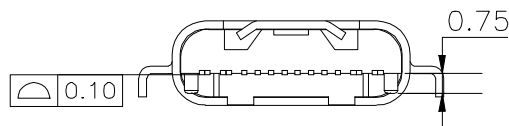


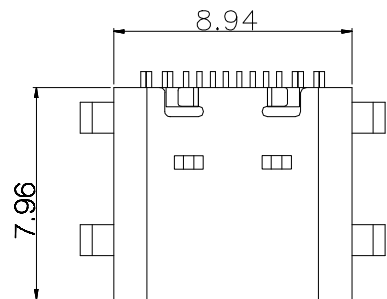

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
- 1.Specifications
 - 1-1.INSERT FORCE:35N MAX.
 - 1-2.WITHDRAW FORCE:10N MIN.INITIAL 8-20N AFTER
 - 1-3.Current rating:1.0A
 - 1-4.Voltage Rating:30V
 - 1-5.Life Test:10000 CYCLES MIN.
 - 1-6.:Dielectric withstanding:voltage100V AC MIN.
 - 1-7.Contact resistance:30mΩ MAX.INITIAL;40mΩ MAX AFTER
 - 1-8.Insulation resistance:100MΩ MIN
 - 1-9.Temperature range:-30°TO +80°

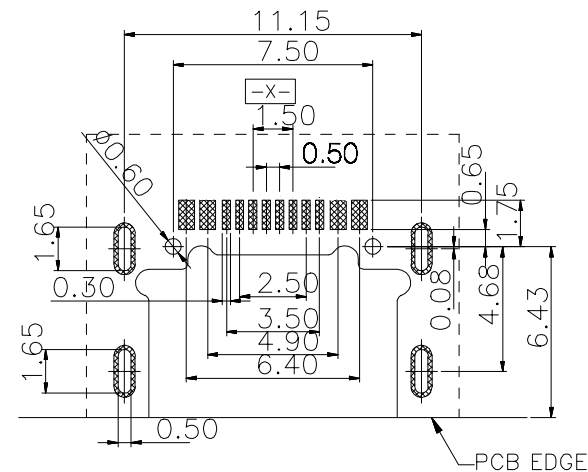

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12				
CHECKED			TITLE:	TYPE C16pin沉板1.1MM		
APPROVALS			PART NO.	TYPE-C-31-M-14		
TOLERANCES ARE		30~125	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15	±2'	DRAWING NO.	PROJ:
		~ 5	±0.10			

	A		NEW			
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.