



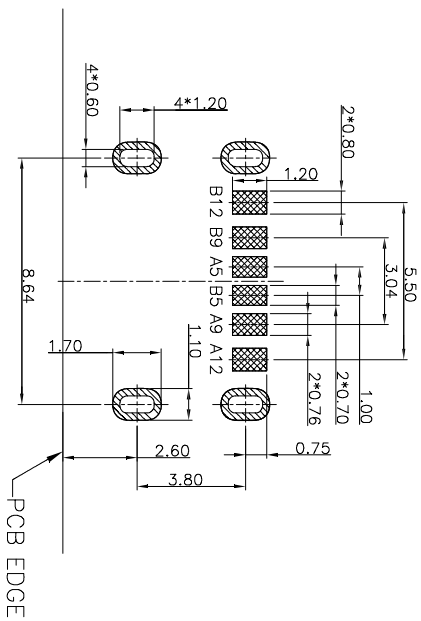
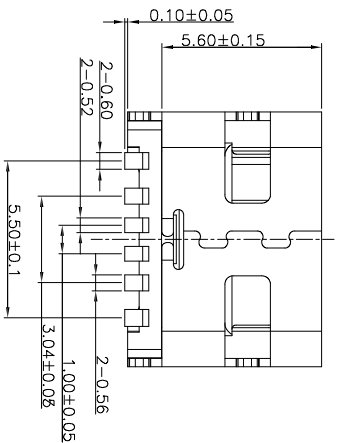
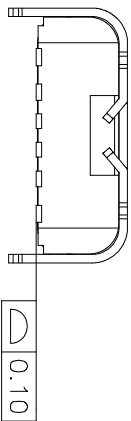


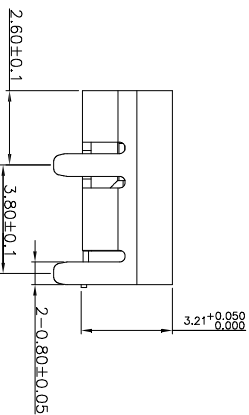

- NOTES:
- SPECIFICATION:
- CURRENT RATING: 3.0A MAX
 - VOLTAGE: 100 VAC
 - TEMPERATURE RANGE: -30 °C ~ 85 °C
 - CONTACT RESISTANCE: 40 MILLIONHM MAX
 - INSULATION RESISTANCE: 100 MEGOHMS MIN.
 - INSERTION FORCE : 5N~20N
 - UNMATING FORCE: 8N~20N
 - DURABILITY: 10000 CYCLES8

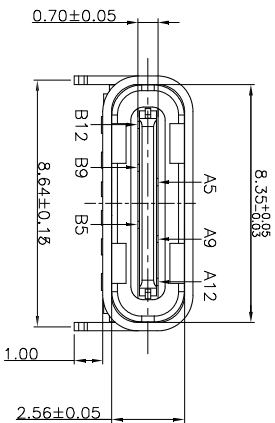

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME

③	Shell	—	1	STAINLESS STEEL	Ni Plated	—
②	Contact	—	6	COPPER ALLOY	Au Plated	—
①	Housing	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD
DRAWN	S.L.L	2019.10.12

							CHECKED		TITLE:	DETECTOR SWITCHS				
							APPROVALS		PART NO.	TYPE-C-31-M-17				
	A		NEW											
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	TOLERANCES ARE							
							30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ.		SHEET 1 OF 1
							10~30	±0.20						
							5~10	±0.15						
							~ 5	±0.10	±2°	DRAWING NO.				