
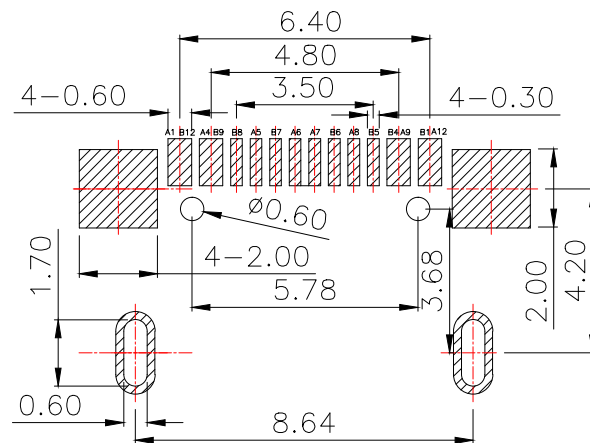






ROHS

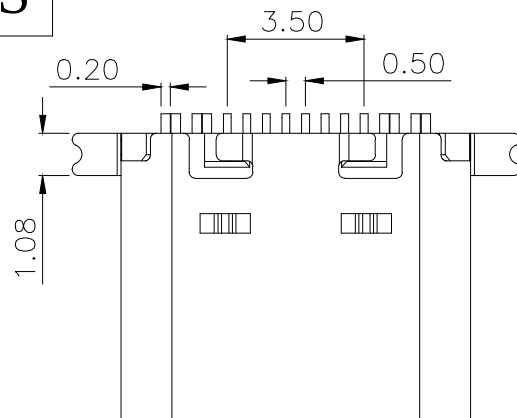

RECOMMENDED PCB LAYOUT
TOL: (± 0.05)

NOTE:

- 1.MATERIAL SPECIFICATION:
 - 1.HOUSING: LCP ,BLACK.
 - 2.CONTACTS: COPPER ALLOY
 - 3.SHELL: SUS
- 2.PLATING SPECIFICATION:
 - 2-1.CONTACTS:
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - 2-2.FRONT SHELL:
Ni 30u" MIN. UNDER PLATED OVER ALL.
- 3.MECHANICAL PERFORMANCE,
 - 3-1.INSERTION FORCE: 5~20N.
 - 3-2.REMOVAL FORCE: 8~20N.
 - 3-3.DURABILITY: 5000 CYCLES.
- 4.ELECTRICAL PERFORMANCE,
 - 4-1. CURRENT RATING: 3A
VOLTAGE RATING: 20V AC
 - 4-2.INSULATION RESISTANCE: 100M Ω MIN
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -40°C~+85°C.

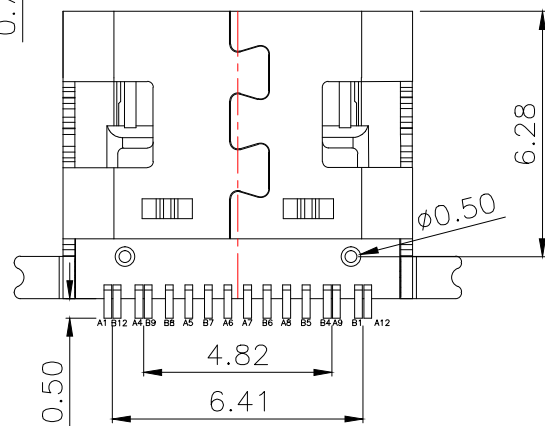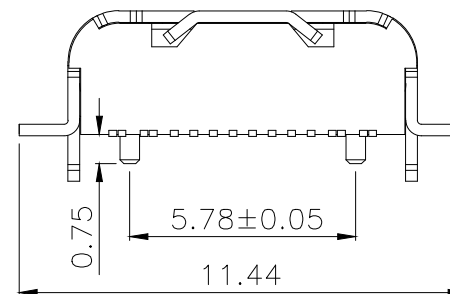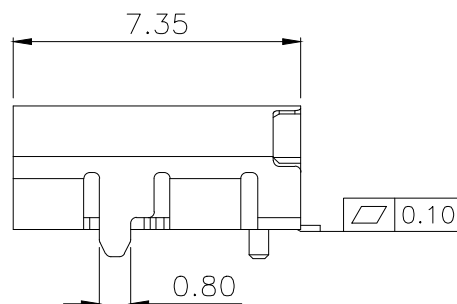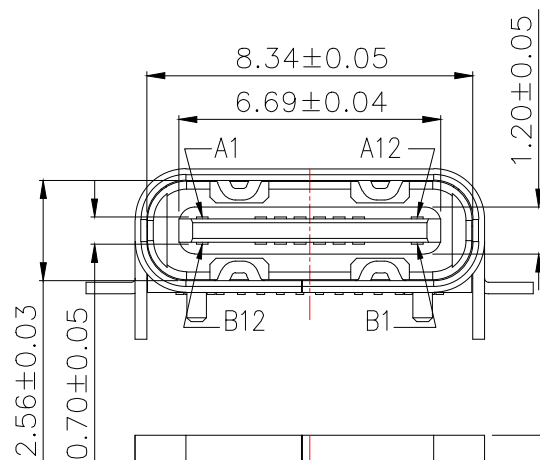

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12	TITLE:	USB CONNECTOR	
CHECKED			PART NO.	TYPE-C-31-M-36	
APPROVALS			UNIT: mm	SCALE: 1:1	PROJ:
TOLERANCES ARE	30~以上	±0.30	ANGLE ±2°	DRAWING NO.	SHEET 1 OF 1
	10~30	±0.25			
	5~10	±0.20			
	~ 5	±0.15			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			