
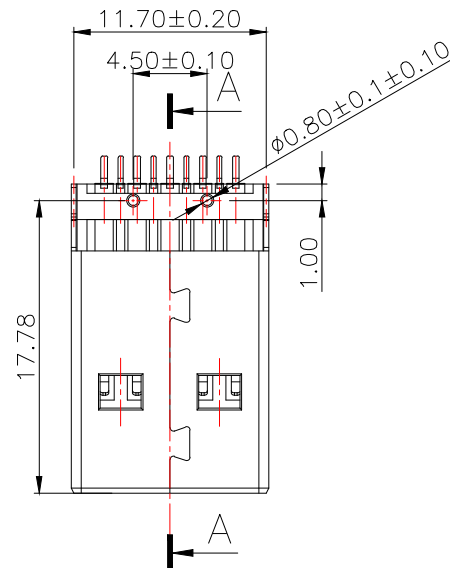
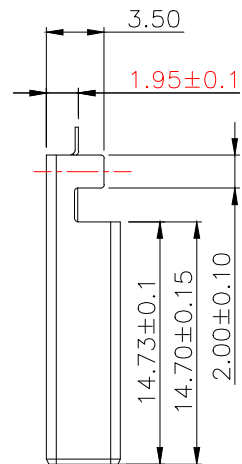


ROHS

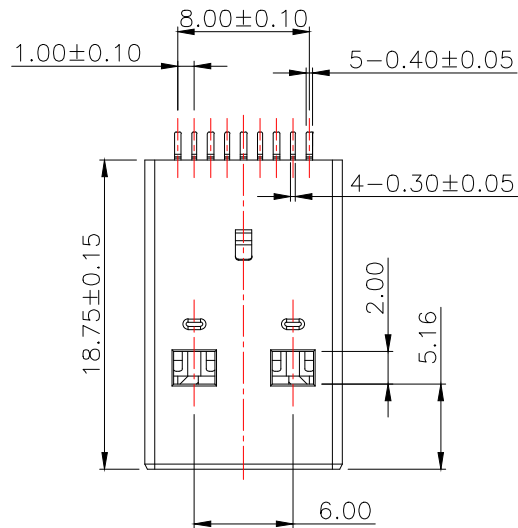

Notes:

1. Electrical

Voltage : 30VAC(R.M.S)

Current Rating : 1.5 Ampere Min.



Contact resistance : 30 Milliohms Max.

Insulation resistance : 100 Megohms Min.


Dielectric withstanding voltage : 500 VAC

2. Environmental :

-55°C to +105°C

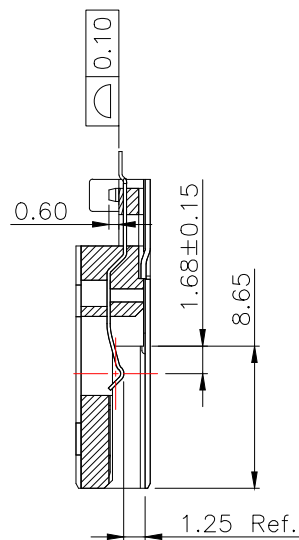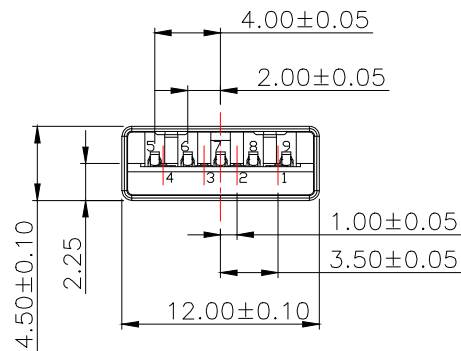

SECTION "A-A"

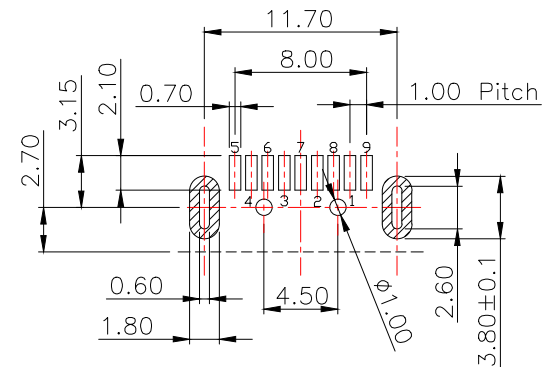

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

③	Shell	—	1	BRASS	Ni Plated	—
②	Contact	—	9	COPPER ALLOY	Au/Sn Plated	—
①	Housing	—	1	PBT	Blue	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12				

CHECKED			TITLE:	USB CONNECTOR		
APPROVALS			PART NO.	U-G-09WS-W-1		

TOLERANCES ARE	30~以上 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE ±2°	UNIT: mm	SCALE: 1:1	PROJ:
DRAWING NO.				SHEET 1 OF 1		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			