
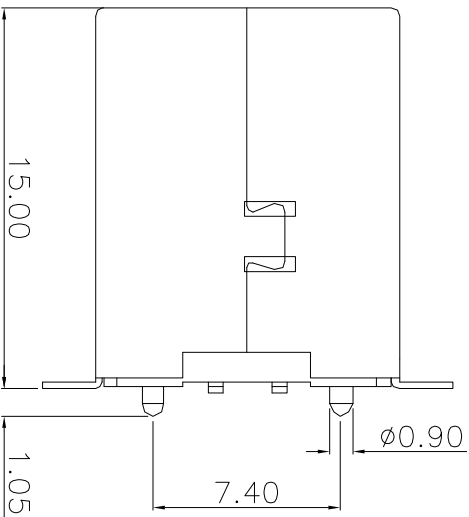
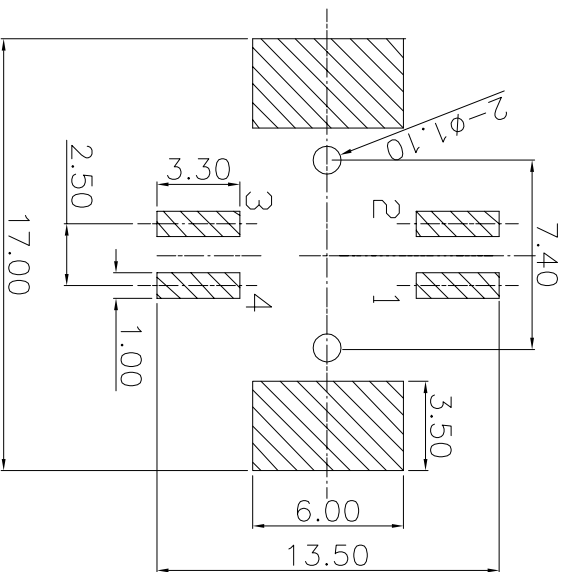
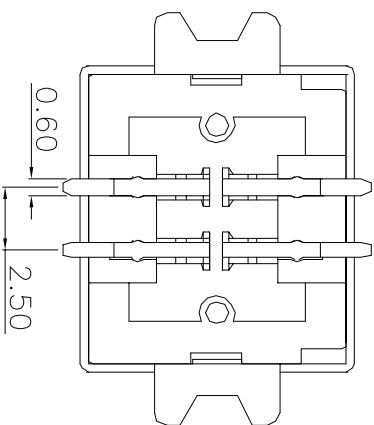
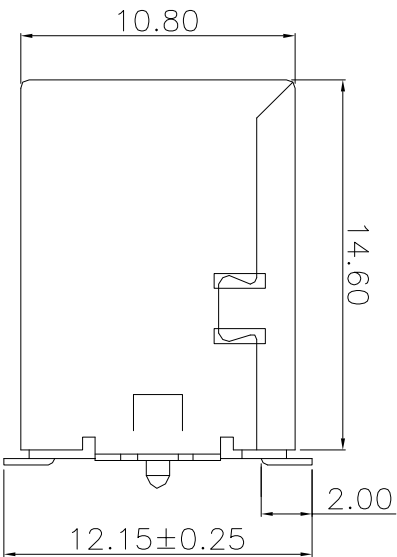


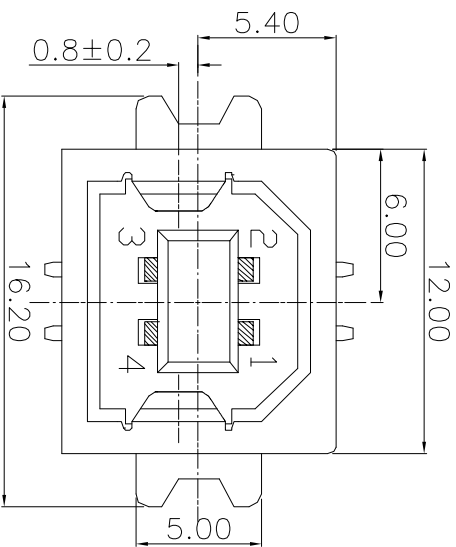

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 1000M Ohm Min. At 500VDC.

Rated Voltage And Current: 1.5A At 250VAC Minimum.

Dielectric Withstanding Voltage:

750V AC (rms) for 1 Minute(Rev. 1.1)

Durability (Life Test): 1500 Cycles

Insertion Force: 35 Newton Maximum.

Extraction Force: 10 Newton Minimum.

RECOMMENDED P.C.B. LAYOUT

③	Base	—	1	PAGT	White/black
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	BRASS	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12			
CHECKED	TITLE:		USB CONNECTOR		
APPROVALS	PART NO.		U-B-M4SS-W-2		
TOLERANCES ARE		30~0.15	±0.30	ANGLE	UNIT: mm
		10~30	±0.25	±2°	SCALE: 1:1
		5~10	±0.20		PROJ:
		~ 5	±0.15		SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		
			CHANGE.		
			CHECK.		
			APPRO.		