

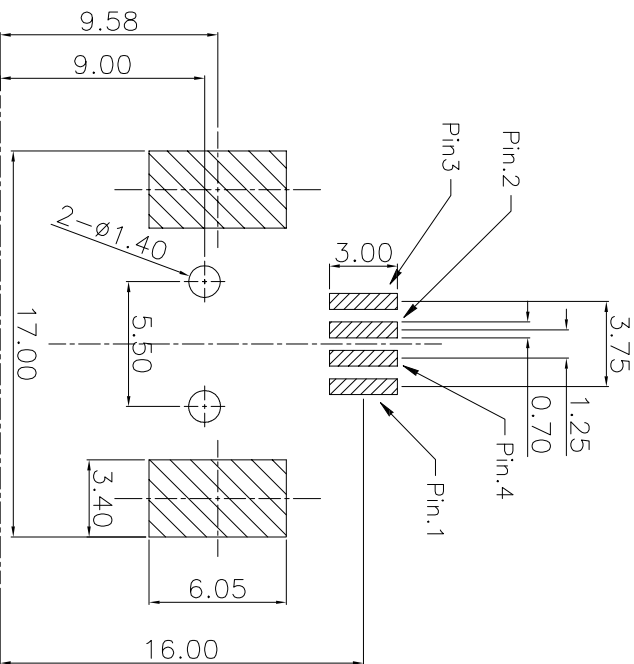
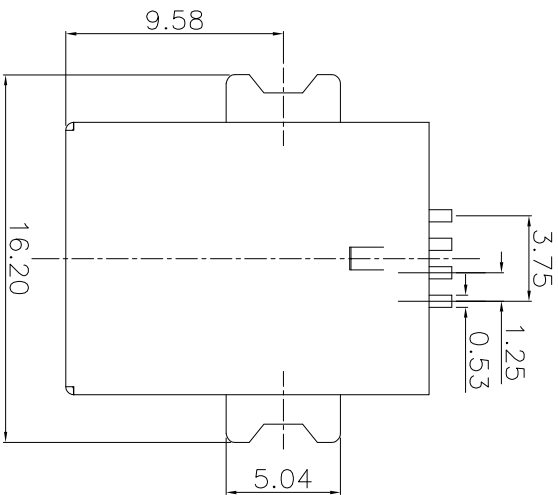


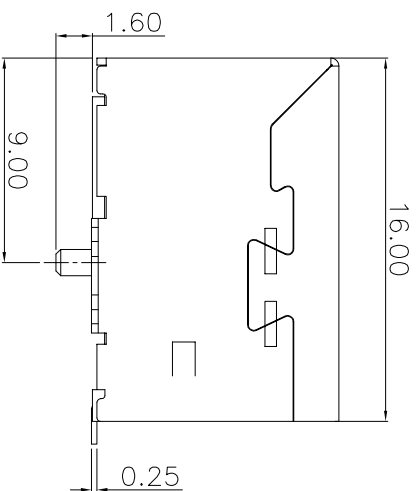

RECOMMENDED P.C.B. LAYOUT

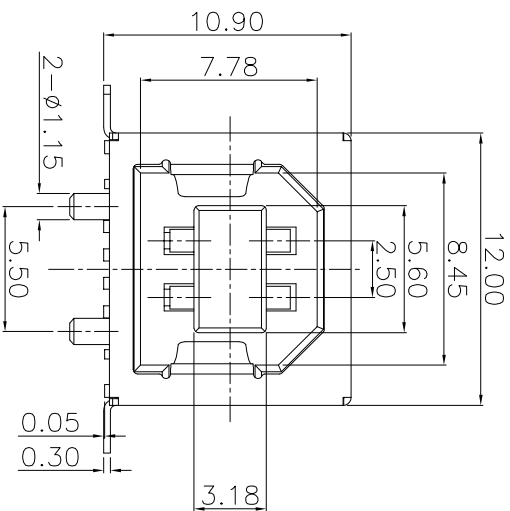

Specification

- 1.Voltage Current Rating:1AMP.30V AC
- 2.Insulation Resistance:1000MΩ Min
- 3.Contact Resistance:30mΩ Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C

NOTE:

Tolerances unless otherwise specified:
0-10:±0.15; 10-20:±0.20; 20-30:±0.25

③	Base	—	1	PAGT	White/black
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	BRASS	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L	2019.10.12		
CHECKED		TITLE:		USB CONNECTOR	
APPROVALS		PART NO.		U-B-M4SS-W-1	
TOLERANCES ARE		30~Ø1.1	±0.30	ANGLE	UNIT: mm
		10~30	±0.25		SCALE: 1:1
		5~10	±0.20		PROJ:
		~ 5	±0.15	±2°	DRAWING NO.
					SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.		
	A		NEW		