
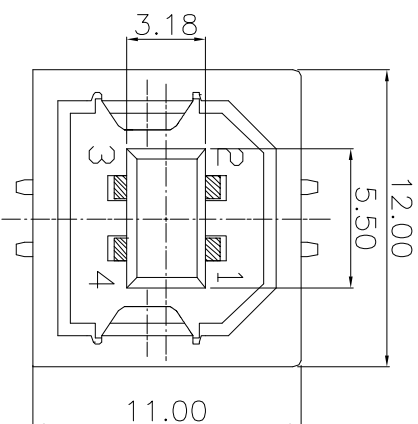
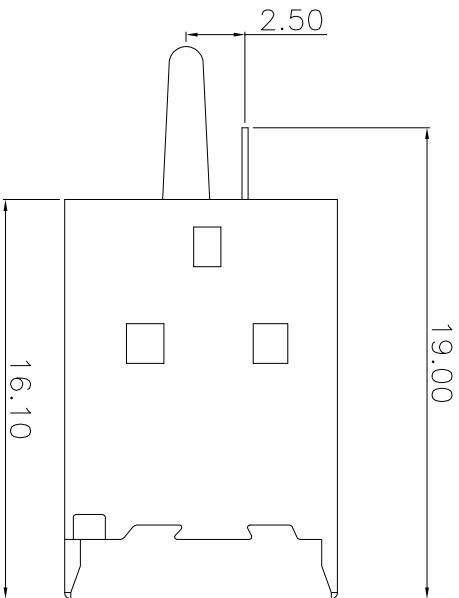
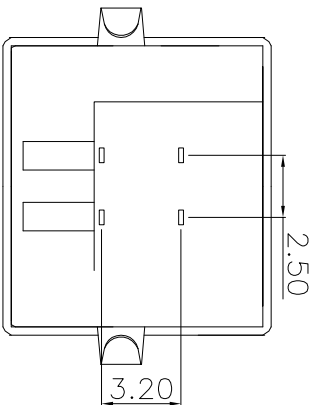


RECOMMENDED P.C.B. LAYOUT

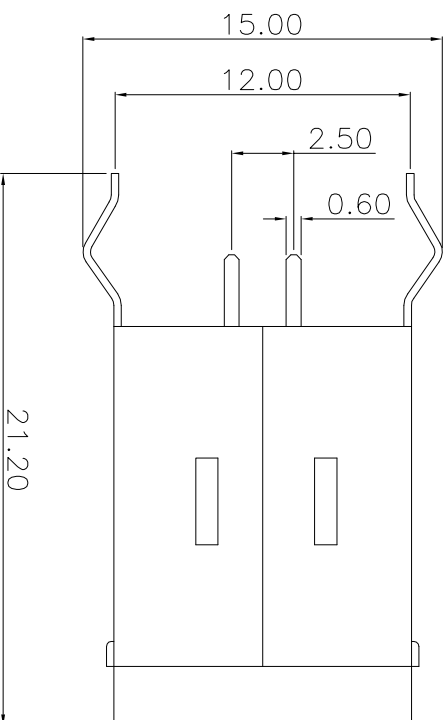

Specification

- 1.Voltage Current Rating:1AMP.30V AC
- 2.Insulation Resistance:1000M Ω Min
- 3.Contact Resistance:30m Ω Max
- 4.Dielectric Withstanding Voltage:500V AC
- 5.Temperature Range:-20°C to +60°C

NOTE:

Tolerances unless otherwise specified:

0-10:±0.15; 10-20:±0.20; 20-30:±0.25

	A								
ECN NO.	REV.	DATE.							

③	Base	—	1	PAGT	White/black
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	BRASS	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12			
CHECKED			TITLE:	USB CONNECTOR	
APPROVALS			PART NO.	U-B-M4DD-W-2	
TOLERANCES ARE		30~Ø上 10~30 5~10 ~5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE	UNIT: mm
			±2'	DRAWING NO.	SCALE: 1:1
					PROJ: 
					SHEET 1 OF 1