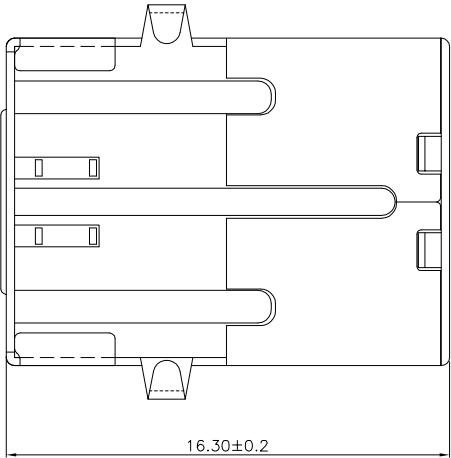
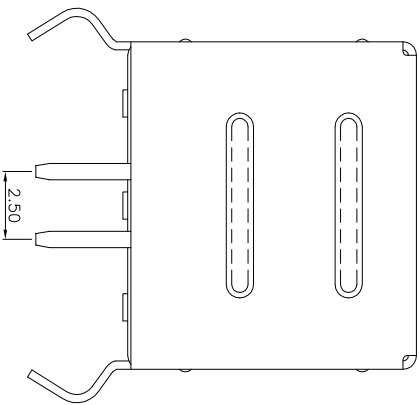
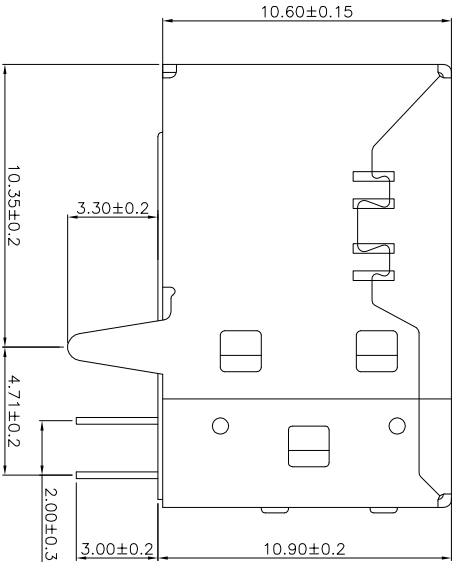
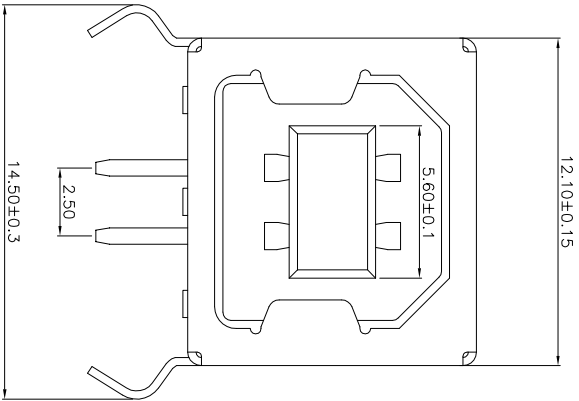


电气特性:Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触阻抗: Contact Resistance
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5. 绝缘阻抗: Insulation Resistance:
1000MEGA ohms MIN

Recommended PCB Layout

③	Base	—	1	NYLON	White
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN		S.L.L		2019.10.12	
CHECKED				TITLE:	
APPROVALS				PART NO.	
TOLERANCES ARE		30~0.15 10~30 5~10 ~ 5		±0.30 ±0.25 ±0.20 ±0.15	
		ANGLE		UNIT: mm	
		±2°		SCALE: 1:1	
		DRAWING NO.		PROJ:	
				SHEET 1 OF 1	
				USB CONNECTOR	
				U-B-M4DD-W-1	
				NEW	
				DESCRIPTION.	
				CHANGE.	
				CHECK.	
				APPRO.	
				REV.	
				DATE.	
				ECN NO.	