
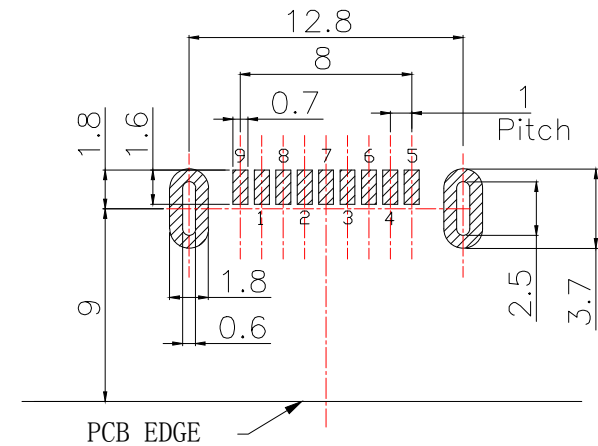
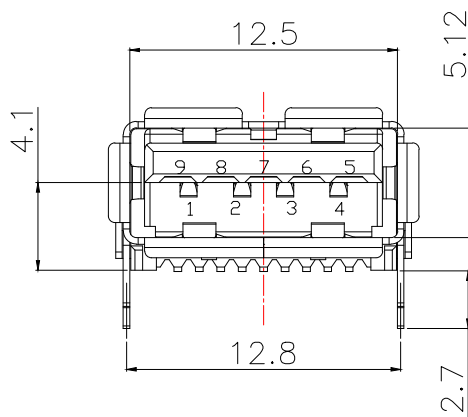
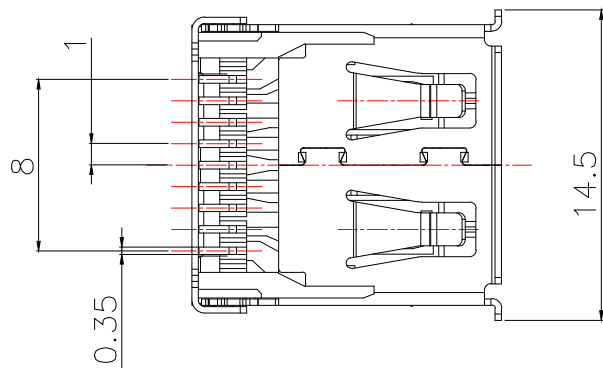
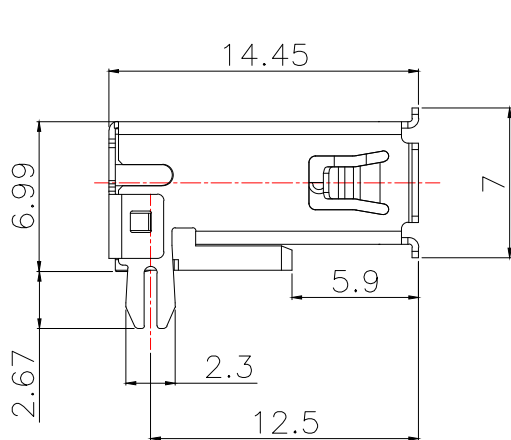


ROHS



RECOMMENDED PCB LAYOUT
TOLERANCES: ± 0.05

- NOTES:
- Material:
 - Insulator: High Temperature Plastic.
 - Contact: Bronze,Au Plated
 - Shell: Brass,Ni Plated
 - Current rating: 1.5A
 - Voltage Rating: 35V AC
 - Mating Force:3.57kgf MAX
 - Uumated Force:0.82kgf MIN
 - Durability Mandatory:1,500 CYCLES
 - Salt Spray: 24 hours

							APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
							DRAWN	S.L.L	2019.10.12				
							CHECKED			TITLE:	USB CONNECTOR		
							APPROVALS			PART NO.	U-A-39DS-Y-1		
	A		NEW				TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
						10~30		±0.20					
						5~10		±0.15					
						~ 5		±0.10					
ECN NO.	REV.	DATE.	DESCRIPTION.			CHANGE.	CHECK.	APPRO.		DRAWING NO.		SHEET 1 OF 1	