

规格书Specification:

电气特性Electrical:

- 额定电流: Current Rating 1.8A/contact terminal
- 额定电压: Voltage Rating 30V DC
- 接触电阻: Contact Resistance 30 milliohms MAX
- 绝缘电压: Dielectric Withstanding Voltage: 500 V AC AT Sea Level
- 接触电阻: Insulation Resistance: 1000MEGA ohms MIN

物理性能Mechanical:

- 插拔力: Connector Mate and Umate Force Mate force:3.57kgf(MAX) Umate force:1.02kgf(MIN)

原材料Material:

- 塑胶:Housing TBP 聚酰胺66

- 端子Contact: Copper Alloy C2680
- 外壳Shell: Copper Alloy C2680/SPCC

电镀Finish:






- 端子Contact: Plated Gold in Mating Area; Tin On Solder Tails

端子四周镀50U"(MIN) 锡, 镀金区域镀100~200U"镀1U"

- 外壳Shell:

端子四周镀80U"(MIN) 锡

Nickel Plating

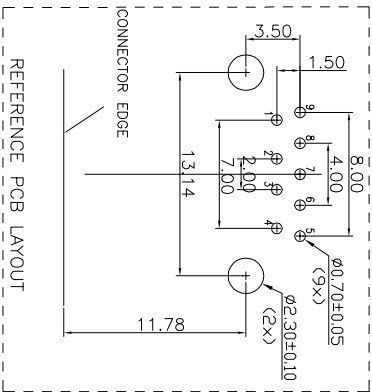

PIN NUMBER	1	2	3	4	5	6	7	8	9	SHELL
SIGNAL NAME	VBUS	D-	D+	GND	SSRX-	SSRX+	GND	SSTX-	SSRT+	SHIELD
	A									NEW
ECN NO.	REV.	DATE.	DESCRIPTION.							

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12				
CHECKED						
APPROVALS						
TOLERANCES ARE			30~0.15	±0.30	ANGLE	PART NO.
			10~30	±0.20		UNIT: mm
			5~10	±0.15		SCALE: 1:1
			~ 5	±0.10	±2°	DRAWING NO.
						SHEET 1 OF 1

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12				
CHECKED						
APPROVALS						
TOLERANCES ARE			30~0.15	±0.30	ANGLE	PART NO.
			10~30	±0.20		UNIT: mm
			5~10	±0.15		SCALE: 1:1
			~ 5	±0.10	±2°	DRAWING NO.
						SHEET 1 OF 1

TITLE: USB CONNECTOR

U-A-39DD-Y-2

PROJ: 1000