ROHS

PIN NUMBER	1	2	3	4	5	6	7	8	9	SHELL
SIGNAL NAME	VBUS	D-	D+	GND	SSRX-	SSRX+	GND	SSTX-	SSRT+	SHIELD

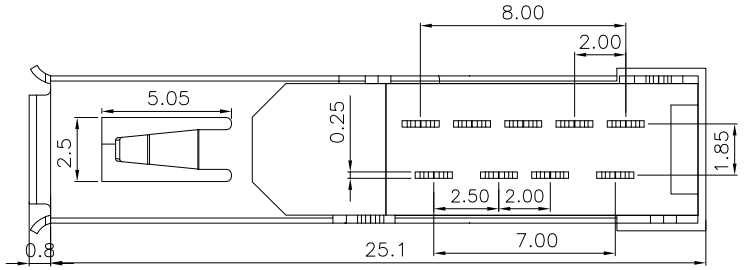

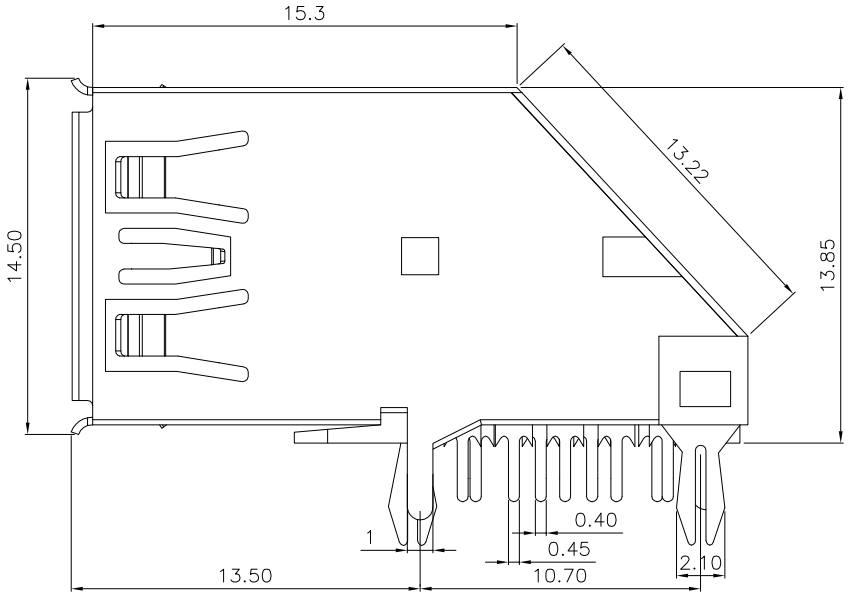

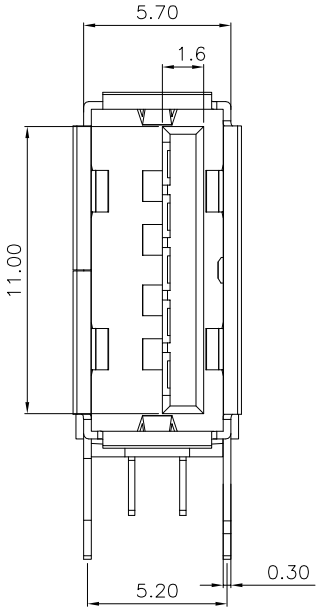

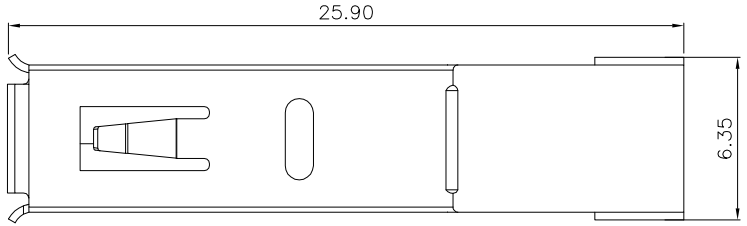

NOTES:
1.Specifications
1−1.INSERT FORCE:35N MAX.
1−2.WITHDRAW FORCE:10N MIN.INITIAL 8−20N AFTER
1−3.Current rating:1.0A
1−4.Voltage Rating:30V
1−5.Life Test:10000 CYCLES MIN.
1−6.:Dielectric withstanding:voltage100V AC MIN.
1−7.Contact resistance:30mΩ MAX.INITIAL;40mΩ MAX AFTER
1−8.Insulation resistance:100MΩ MIN
1−9.Temperature range:−30°TO +80°

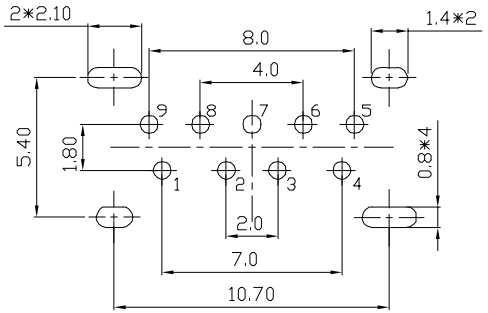

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

———	A	———	NEW	———	———	———
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD
DRAWN	S.L.L	2019.10.12	
CHECKED			TITLE: USB CONNECTOR
APPROVALS			PART NO. U−A−39DD−Y−1

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	———	SHEET 1 OF 1
	~ 5	±0.10				