

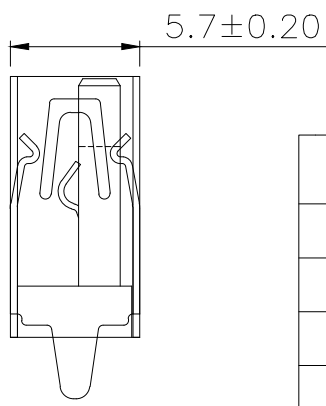


ROHS

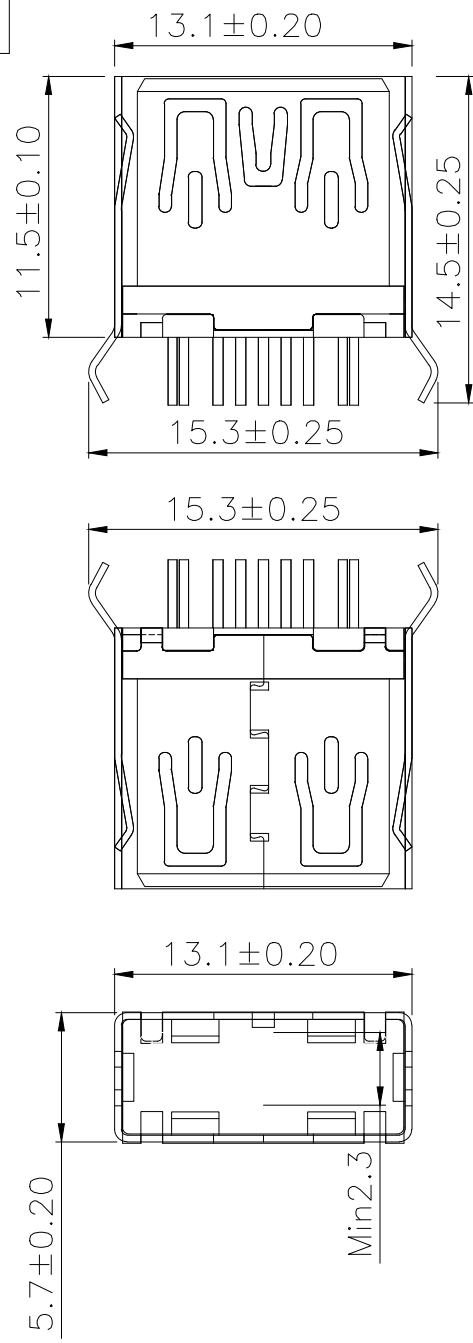

PIN NU_BER	SIGNAL NAME
1	USB电压
2	D-(负极)
3	D+(正极)
4	地线
5	SSRX-
6	SSRX+
7	GND(地线)
8	SSTX-
9	SSTX+
shell	SHIELD

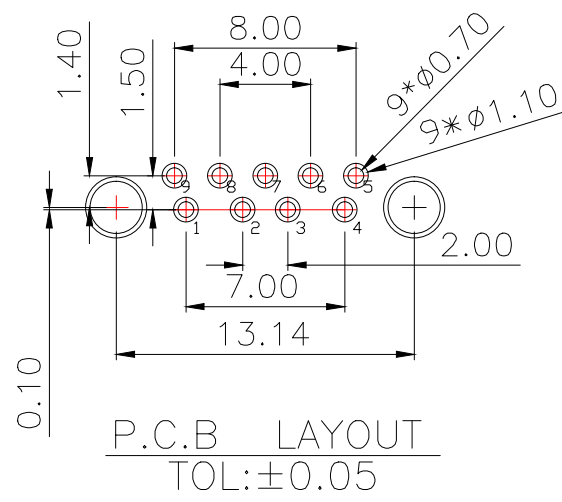

规格说明Specifications:
电气特性Electrical:

- 1.额定电流Current Rating:
1.5A/contact terminal接触端子
- 2.额定电压Voltage Rating:
30V DC
- 3.接触阻抗Contact Resistance:
30 milliohms MAX
- 4.耐电压Dielectnic Withstanding Voitage:
500 V AC AT Sea Level
- 5.绝缘阻抗Insulation Resistance:
1000MEGA ohms MIN

物理性能Mechanical:

- 1.插拔力Cnnector Mate and Unmate Force:
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力Terminal Retenion:
1.0kgf(MIN)

原材料Matorial:

- 1.塑胶Housing:
Hing Temperature Tthermaplastics,
- 2.端子Contact:H65黄铜Copper Alloy C2680
- 3.外壳Shell:H65黄铜Copper Alloy C2680/SPCC

电镀Finish:

- 1.端子Contact: Plated Gold in Mating Area;
Tin On Solder Talls

端子四周镀锡30—50U”(MIN),镀金区域镀金1U”

- 2.外壳:Shell:

铁壳四周镀80U”(MIN)镍

Nickel Plating

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN	S.L.L	2019.10.12					
CHECKED				TITLE:	USB CONNECTOR		
APPROVALS				PART NO.	U-A-39DD-W-3		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.25				
		5~10	±0.20				
		~ 5	±0.15				
		±2°		DRAWING NO.	—————	SHEET 1 OF 1	