
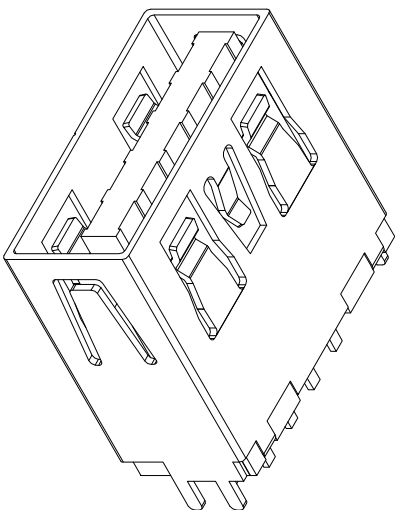
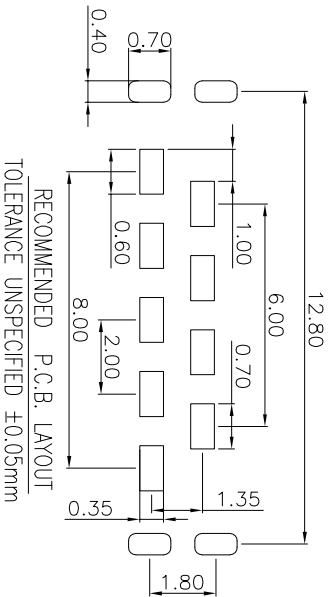
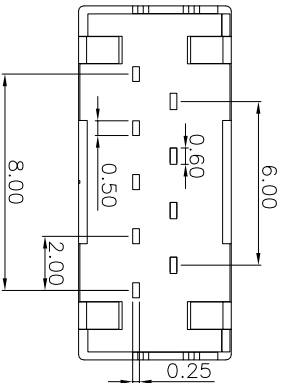
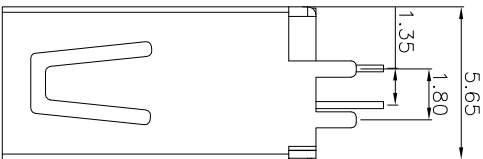
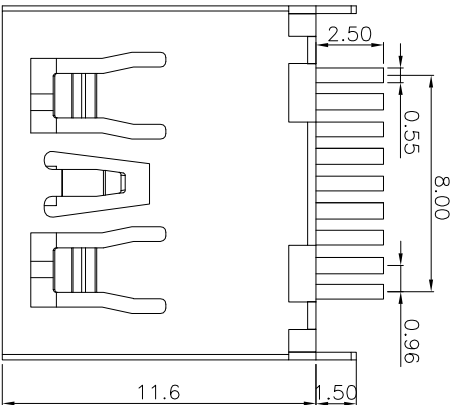


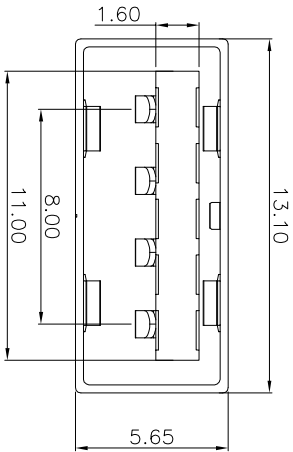

NOTES:

- Specifications
- 1-1.INSERT FORCE:35N MAX.
- 1-2.WITHDRAW FORCE:10N MIN.INITIAL 8-20N AFTER
- 1-3.Current rating:1.0A
- 1-4.Voltage Rating:30V
- 1-5.Life Test:10000 CYCLES MIN.
- 1-6.:Dielectric withstanding:voltage100V AC MIN.
- 1-7.Contact resistance:30mΩ
- MAX.INITIAL:40mΩ MAX AFTER
- 1-8.Insulation resistance:100MΩ MIN
- 1-9.Temperature range:-30°TO +80°

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12	TITLE: USB CONNECTOR			
CHECKED			PART NO. U-A-39DD-W-1			
APPROVALS			SCALE: 1:1			
TOLERANCES ARE		30~11.11 ±0.30	ANGLE	UNIT: mm	PROJ:	SHEET 1 OF 1
		10~30 ±0.20				
		5~10 ±0.15				
		~ 5 ±0.10	±2'	DRAWING NO.		
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			
			CHANGE.			
			CHECK.			
			APPRO.			