
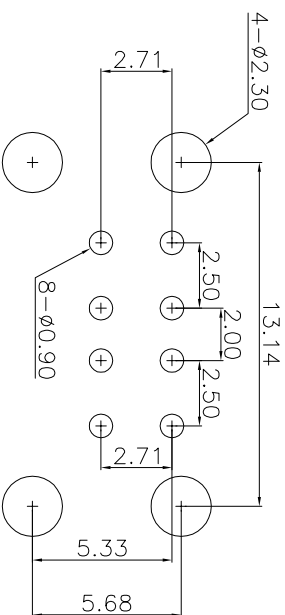
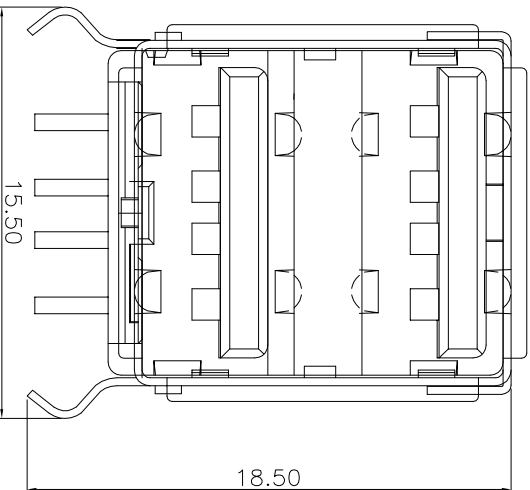
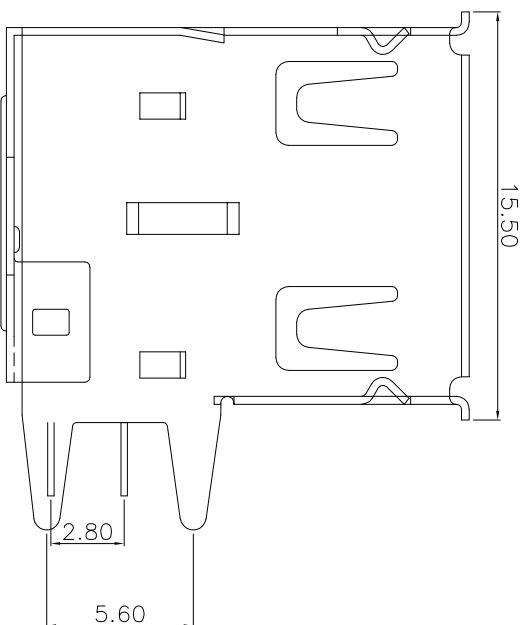


1. Material:
Contaeis:Phosphone
Bronze
insulater:PBT+30%
G.F. UL 94V-0
Shell:SPCC
2. Mechanical:
Mating:35N max.
Withdrowa Force:10N min.
Darabirity:1500 cycles min.
3. Elecetical:
Current-max (amps)1. 5A
Voitage-max (volts) 30V
Withstanding Voitage 750V AC
Contact Resistance(ohms) 30
milliohms max insulation
Resistance (ohms) 1000 Megogms
min.
4. Plating:
Contacts:Gold And Tin Over
Nickel Ploled
Shell: Nickel over all plating.
5. Environmental:
tempereture Range:-55 to 85 .

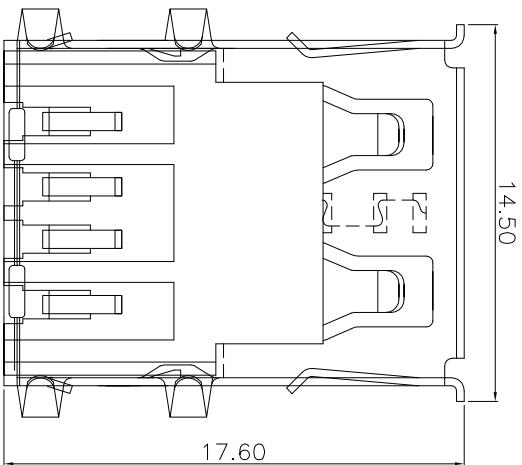

Recommended PCB Layout

Shell: Nickel over all plating.

5. Environmental :
temperature Range:-55 to 85 .

③	Base	—	1	NYLON		
②	Terminal	—	8	Phosphor Bronze	Ag Plated	
①	Housing	—	1	SPCC	Sn Plated	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE				
DRAWN		S.L.L		2019.10.12		
CHECKED				TITLE: USB CONNECTOR		
APPROVALS				PART NO. U-A-28DD-Y-1		
TOLERANCES ARE		30~0.15 10~0.30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE		UNIT: mm SCALE: 1:1
				DRAWING NO.		PROJ. SHEET 1 OF 1