






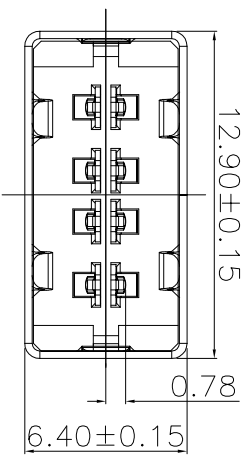
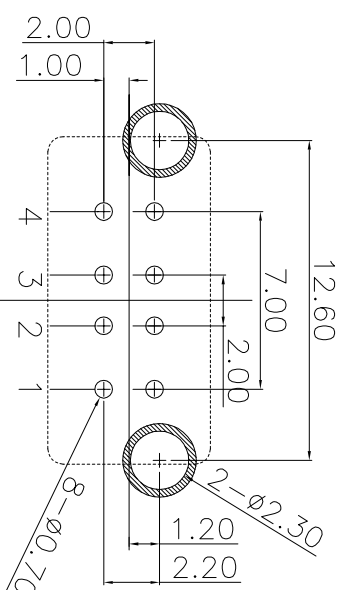
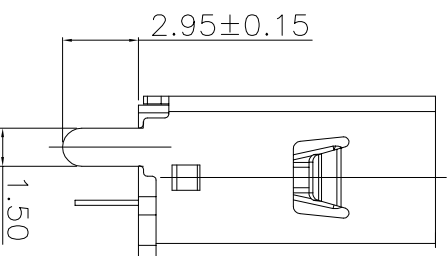


NO. 1	
PART NO	NOTE
U-A-28D1-W-3	black
U-A-28D2-W-3	White

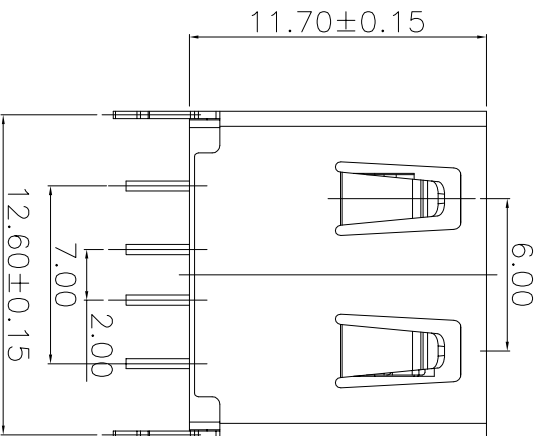

公头可正向插入

公头可反向插入

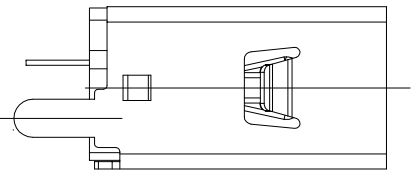

PCB Layout recommended

NOTES:

1. MATERIAL:

1.1 HOUSHING:THERMOPLASTIC COLOR:BLACK/WHITE

1.2 CONTACT: COPPER ALLOY

2. PLATING;

CONTACT:

1). GOLD FLASH CONTACT AREA;120u” TIN SOLDER;NICKEL OVER ALL

2). 5u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

3). 15u" GOLD CONTACT AREA;120u" TIN SOLDER;NICKEL OVER ALL

4. ENVIRONMENTAL:

OPERATION TEMPERATURE: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

5. PRODUCT COMPLIANT TO THE REQUEST OF ROHS

[illegible]

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING
③	Base	—	1	NYLON	White/black
②	Terminal	—	8	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated

APPROVALS	DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD
SDRAWN	S.L.L 2019.10.12	

CHECKED		TITLE:	USB CONNECTOR
APPROVALS		PART NO.	

	30~45°	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
TOLERANCES ARE	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15	±2°	DRAWING NO. _____		SHEET 1 OF _____