ROHS

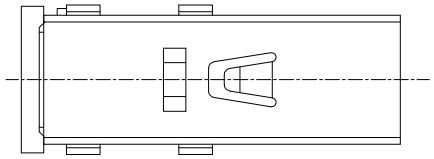

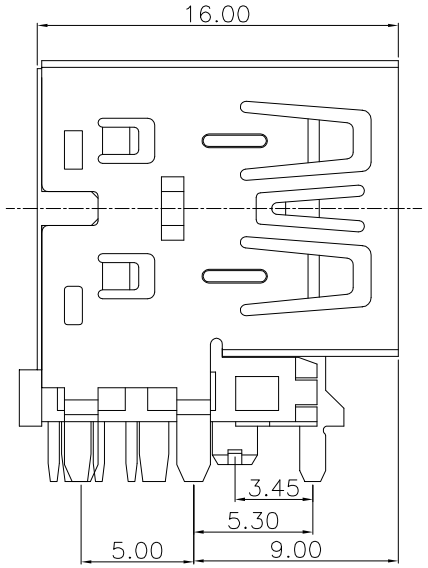

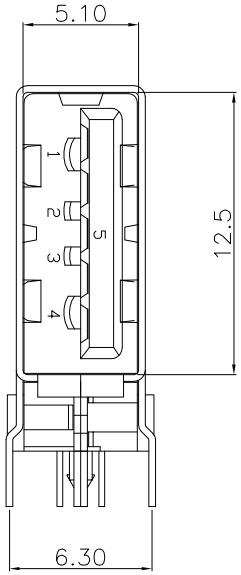

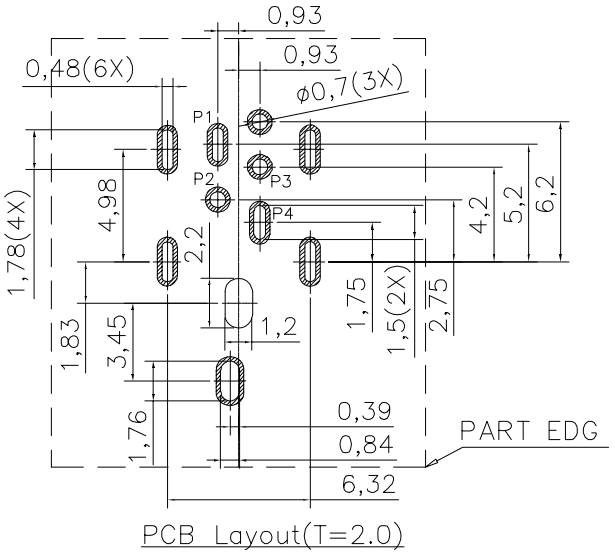

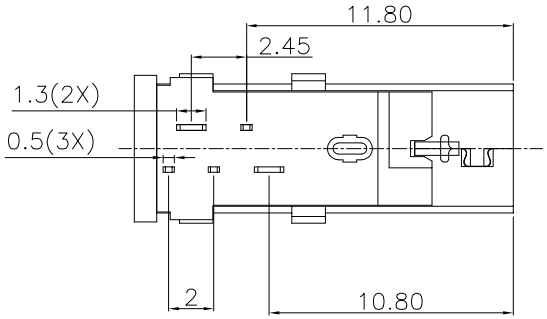

NOTES:

1. MATERIALS AND FINISHES:
   HOUSING MATERIAL:
   PIN MATERIAL:
   CONTACT AREA:
   SOLDER TAIL:
   SHELL MATERIAL: T=0.30mm
   PLATED Ni 50U" MIN

2. ELECTRICAL CHARACTERISTICS:
   CONTACT RESISTANCE:30mΩ Max.
   DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.
   INSULATION RESISTANCE: 1000MΩ MIN.
3. MECHANICAL CHARACTERISTICS:
   CONTACT INSERTION FORCE: 35 N MAX.
   CONTACT SEPARATION FORCE: 10 N MIN(AFTER CYCLE 1500).
4. MATERIAL MUST FULFILL GWI4-11 SALCOMP HAZARDOUS SUBSTANCES MANAGEMENT STANDARD LATEST VERSION.

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD
DRAWN	S.L.L	2019.10.12	
CHECKED			TITLE: USB CONNECTOR
APPROVALS			PART NO. U-A-25DD-W-1

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.		SHEET 1 OF 1
	~ 5	±0.10				