


规格说明: Specifications:

电气特性: Electrical:

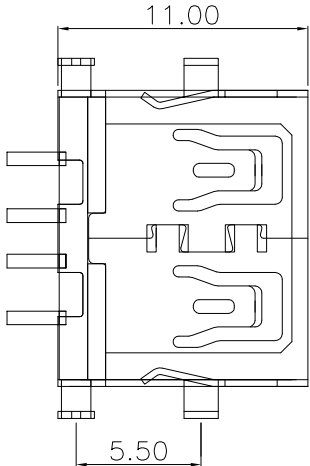

1. 额定电流: Current Rating

1.5A/contact terminal

2. 额定电压: Voltage Rating

30V DC

3. 接触电阻: Contact Resistance

30 milliohms MAX

4. 耐电压: Dielectric Withstanding Voltage:

500 V AC AT Sea Level

5. 绝缘电阻: Insulation Resistance:

1000MEGA ohms MIN

物理性能: Mechanical:

1. 插拔力: Connector Mate and Unmate Force

Mate force: 3.57kgf(MAX)

Unmate force: 1.02kgf(MIN)



2. 端子保持力: Terminal Retention

1.0kgf(MIN)

原材料: Material:

1. 塑胶: Housing:

Hing Temperature Ternmaplastics,

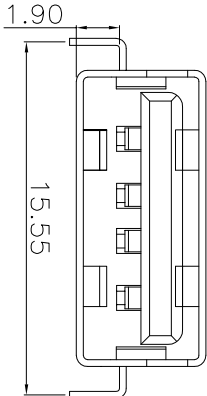

2. 端子: Contact: Copper Alloy C2680

3. 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

1. 端子: Contact: Plated Gold in Mating Area;


Tin On Solder Tails

端子四周镀50U”(MIN)锡,镀金区域镀100—200U”镀金1U”



2. 外壳: Shell:

铜壳四周镀80U”(MIN)锡

Nickel Plating

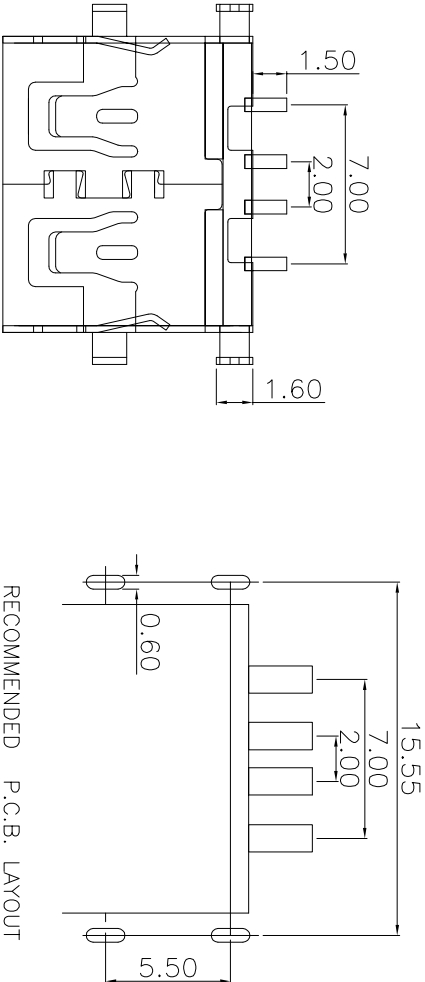

RECOMMENDED P.C.B. LAYOUT

							
RECOMMENDED				P.C.B. LAYOUT			