
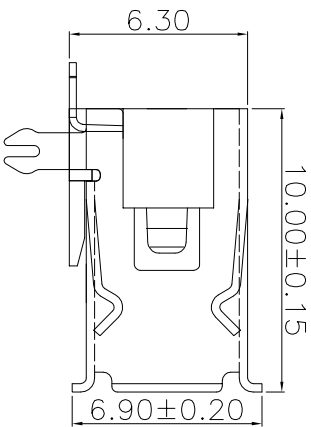
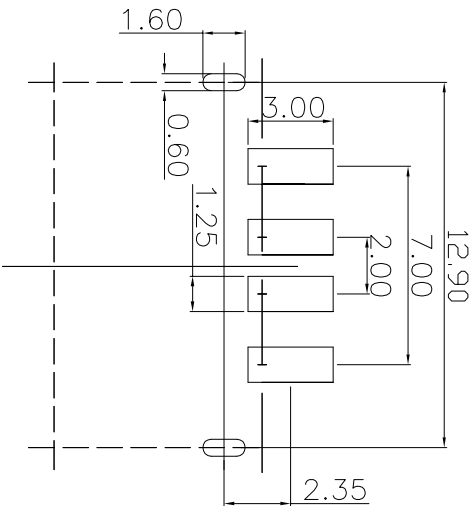


PART NO	H
U-A-24DD-Y-11	6.30
U-A-24DD-Y-12	6.80

规格说明: Specifications:

电气特性: Electrical:

- 1. 额定电流: Current Rating
1.5A/contact terminal
- 2. 额定电压: Voltage Rating
30V DC
- 3. 接触电阻: Contact Resistance
30 milliohms MAX
- 4. 耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 5. 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

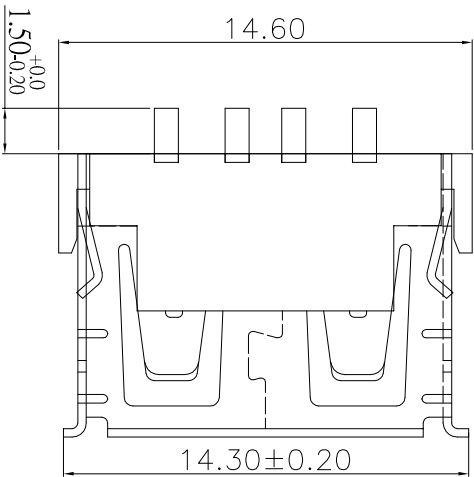

Recommended PCB Layout

③	Base	—	1	NYLON		
②	Terminal	—	4	Phosphor Bronze	Ag Plated	—
①	Housing	—	1	SPCC	Sn Plated	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS		DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L		2019.10.12		
CHECKED		TITLE:		USB CONNECTOR		
APPROVALS		PART NO.				
TOLERANCES ARE		30~0.15 10~30 5~10 ~ 5	±0.30 ±0.25 ±0.20 ±0.15	ANGLE	UNIT: mm	SCALE: 1:1
ECN NO.		REV.	DATE.	DESCRIPTION.		PROJ: SHEET 1 OF 1
		A		NEW		