
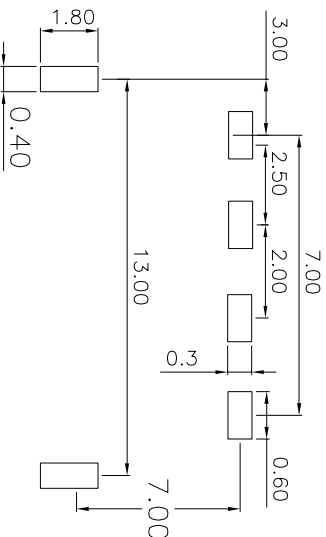
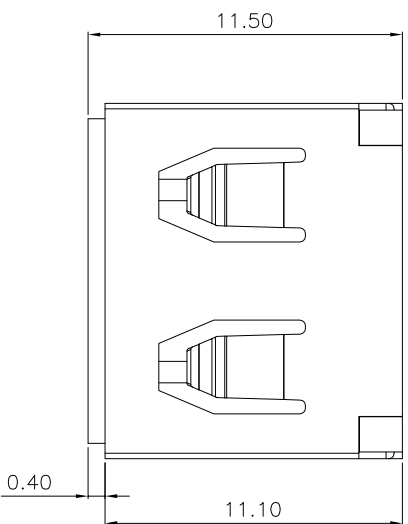
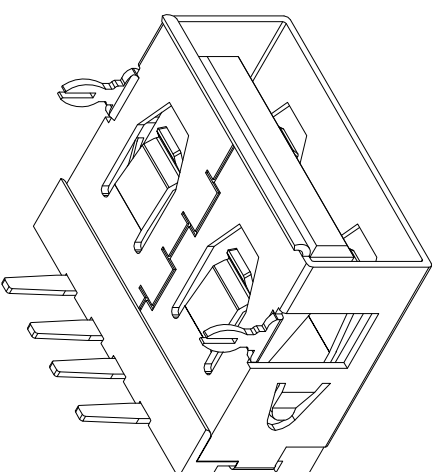
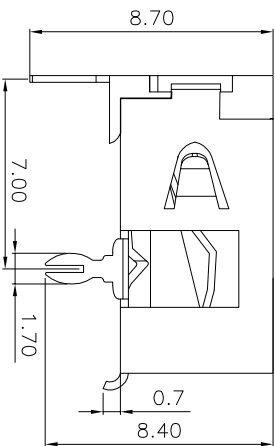


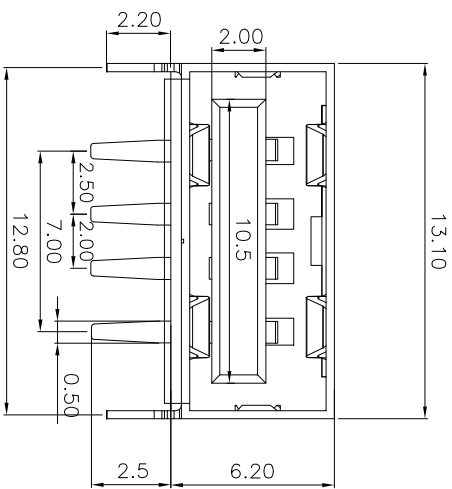

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

NOTES:

- 1.Specifications
- 1-1.INSERT FORCE:35N MAX.
- 1-2.WITHDRAW FORCE:10N MIN.INITIAL 8-20N AFTER
- 1-3.Current rating:1.0A
- 1-4.Voltage Rating:30V
- 1-5.Life Test:10000 CYCLES MIN.
- 1-6.:Dielectric withstanding:voltage100V AC MIN.
- 1-7.Contact resistance:30m Ω
- MAX.INITIAL:40m Ω MAX AFTER
- 1-8.Insulation resistance:100M Ω MIN
- 1-9.Temperature range:-30 $^{\circ}$ T0 +80 $^{\circ}$

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2019.10.12	TITLE: USB CONNECTOR			
CHECKED			PART NO. U-A-24DD-Y-1			
APPROVALS			SCALE: 1:1			
TOLERANCES ARE		30 $\sim$ 11.11	± 0.30	ANGLE	UNIT: mm	PROJ:
		10 $\sim$ 30	± 0.20			
		5 $\sim$ 10	± 0.15			
		$\sim$ 5	± 0.10	$\pm 2^{\circ}$	DRAWING NO.	SHEET 1 OF 1
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			