
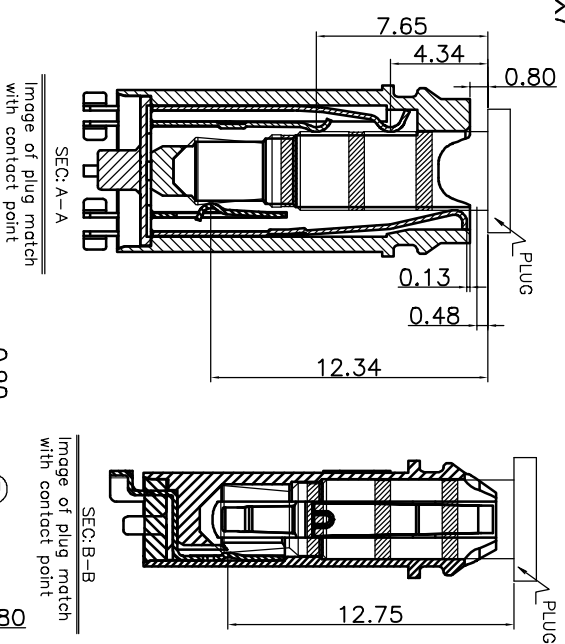


- NOTES:
1. CONTACT CURRENT RATING: 12V 1A.
 2. CONTACT RESISTANCE: 50mΩ MAX.;
 3. INSULATION RESISTANCE: 100M MIN. 500V DC;
 4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
 5. DURABILITY: 5,000 CYCLES MIN.;
 6. CONNECTOR MATING FORCES: 29.4N (3.00kgf) MAX.;
 7. CONNECTOR UNMATING FORCES: 2.94N (0.30kgf) MIN.;



APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD
DRAWN	S.L.L	2019.10.12	

					CHECKED		TITLE:	PHONE JACK (防水)
					APPROVALS		PART NO.	PJ-614
	A		NEW				UNIT: mm	SCALE: 1:1
ECON NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.	DRAWING NO.	PROL. SHEET 1 OF 1