

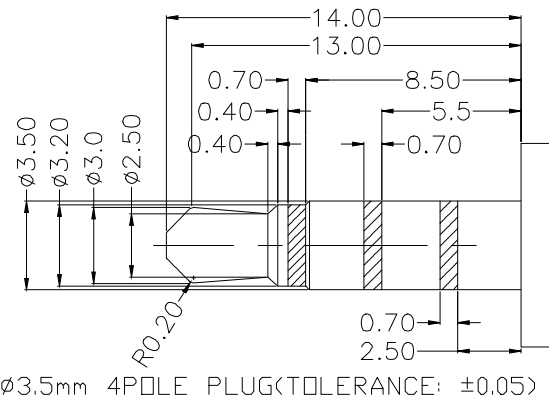
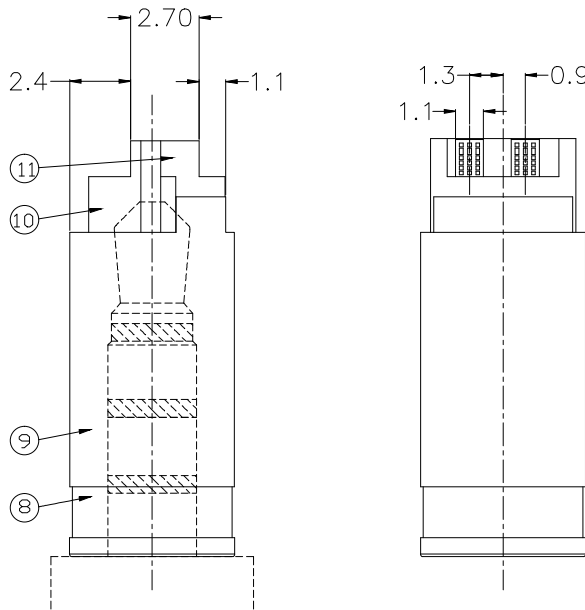
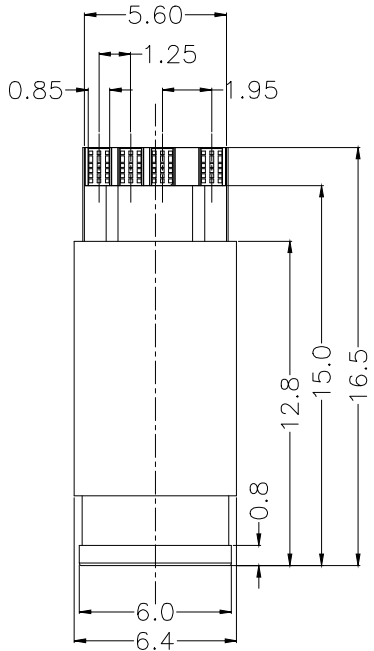
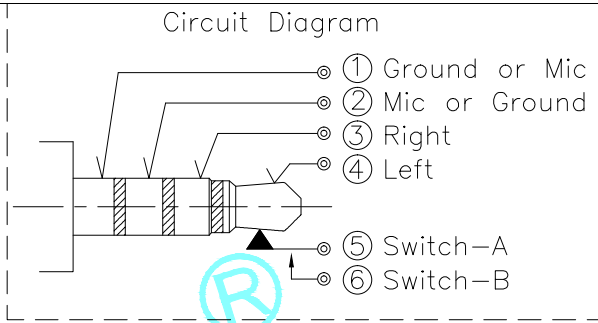
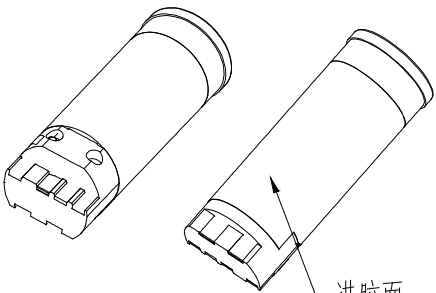


ROHS



Rating:1A 12V DC
Contact Resistance:100 mΩ Max.
Operating temperature:-25℃~85℃
Operating force:30N Min
Operating Life:5,000cycles

12	Separator	—	1	Thermoplastics	White	—
11	Cover2	—	1	Thermoplastics	White	—
10	Cover1	—	1	Thermoplastics	White	—
9	Housing	—	1	Thermoplastics	White	—
8	Sleeve	—	1	Copper Alloy	Ni Plating	—
7	Spring Contact	—	1	Copper Alloy	Ni Plating	—
6	Switch B Contact	—	1	Copper Alloy	Ni Plating	—
5	Switch A Contact	—	1	Copper Alloy	Ni Plating	—
4	Left Contact	—	1	Copper Alloy	Ni Plating	—
3	Right Contact	—	1	Copper Alloy	Ni Plating	—
2	Mic Contact	—	1	Copper Alloy	Ni Plating	—
1	Ground Contact	—	1	Copper Alloy	Ni Plating	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS			DATE		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN		S.L.L		2019.10.12				
CHECKED					TITLE:		PHONE JACKES	
APPROVALS					PART NO.		PJ-618	
TOLERANCES ARE		30~以上		±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30		±0.20				
		5~10		±0.15				
		~ 5		±0.10				
				±2°	DRAWING NO.			SHEET 1 OF 1

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.