


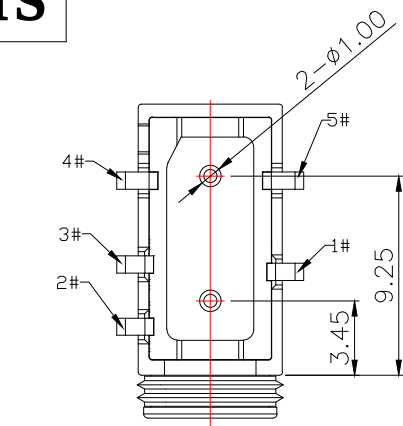
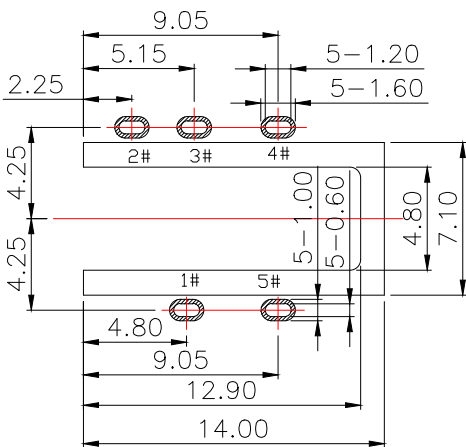
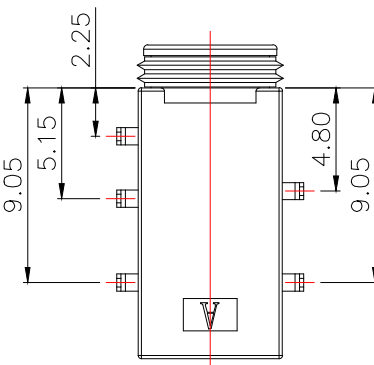



ROHS

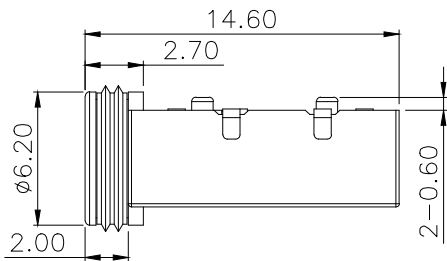


3D VIEW

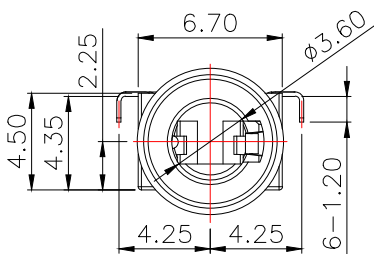

P.C.B LAYOUT(TOP view)

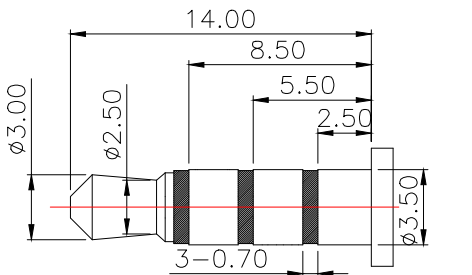

(Ø3.50mm 4 POLE PLUG)

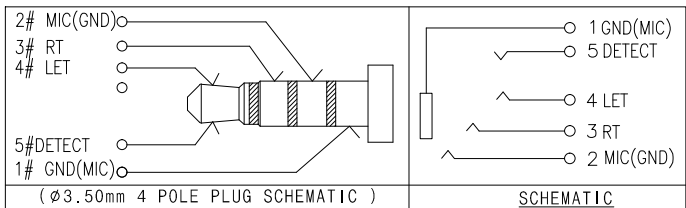

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

③	Waterproof ring	——	1	Silica gel	——	——
②	Terminal	——	5	Phosphor bronze/SUS	Ni Plating	——
①	Housing	——	1	HTP	Black	——
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS			DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD		
DRAWN		S.L.L		2019.10.12		
CHECKED				TITLE:	PHONE JACKS	
APPROVALS				PART NO.	PJ-621A	
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.20			
		5~10	±0.15			
		~ 5	±0.10			
		±2'		DRAWING NO.	——	PROJ: 
						SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			