



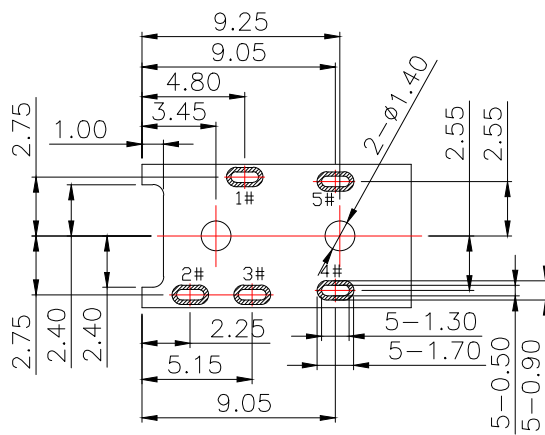




ROHS

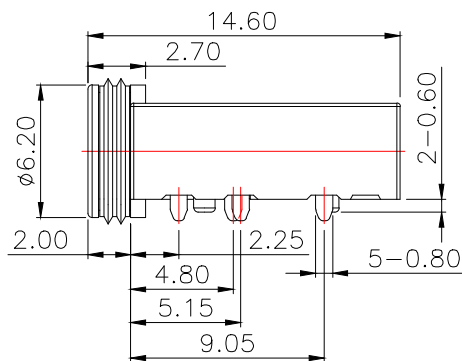


3D VIEW

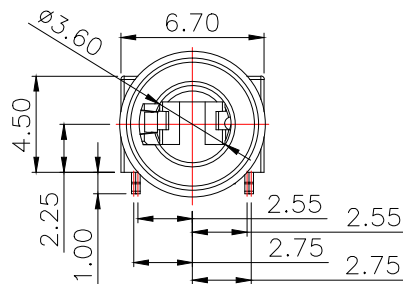

P.C.B LAYOUT(TOP view)

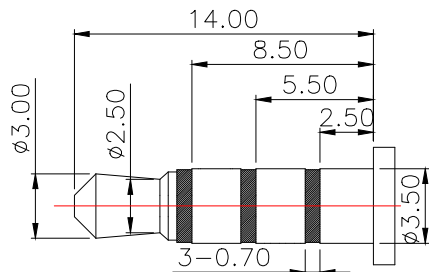

(ø3.50mm 4 POLE PLUG )

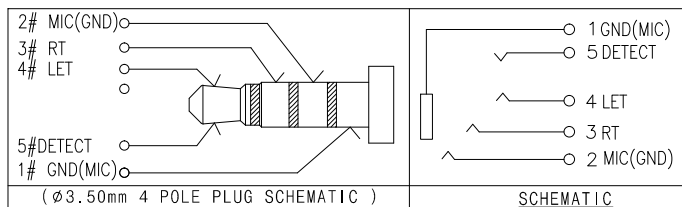

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 100 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;
8. TERPROOF LEVEL: IPX7;

|                |                 |         |            |                                    |              |                                                                                             |
|----------------|-----------------|---------|------------|------------------------------------|--------------|---------------------------------------------------------------------------------------------|
| ③              | Waterproof ring | ——      | 1          | Silica gel                         | ——           | ——                                                                                          |
| ②              | Terminal        | ——      | 5          | Phosphor bronze/SUS                | Ni Plating   | ——                                                                                          |
| ①              | Housing         | ——      | 1          | HTP                                | Black        | ——                                                                                          |
| ITEM           | PART NAME       | TER'NO. | QTY.       | MATERIAL                           | FINISHING    | REMARK                                                                                      |
| APPROVALS      |                 |         | DATE       | LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD |              |                                                                                             |
| DRAWN          |                 | S.L.L   | 2019.10.12 |                                    |              |                                                                                             |
| CHECKED        |                 |         |            | TITLE:                             | PHONE JACKES |                                                                                             |
| APPROVALS      |                 |         |            | PART NO.                           | PJ-621C      |                                                                                             |
| TOLERANCES ARE |                 | 30~以上   | ±0.30      | ANGLE                              | UNIT: mm     | SCALE: 1:1                                                                                  |
|                |                 | 10~30   | ±0.20      |                                    |              |                                                                                             |
|                |                 | 5~10    | ±0.15      |                                    |              |                                                                                             |
|                |                 | ~ 5     | ±0.10      |                                    |              |                                                                                             |
|                |                 | ±2°     |            | DRAWING NO.                        | ——           | PROJ:  |
|                |                 |         |            |                                    |              | SHEET 1 OF 1                                                                                |

|         |   |      |       |     |              |         |        |        |
|---------|---|------|-------|-----|--------------|---------|--------|--------|
| ECN NO. | A | REV. | DATE. | NEW | DESCRIPTION. | CHANGE. | CHECK. | APPRO. |
|---------|---|------|-------|-----|--------------|---------|--------|--------|