

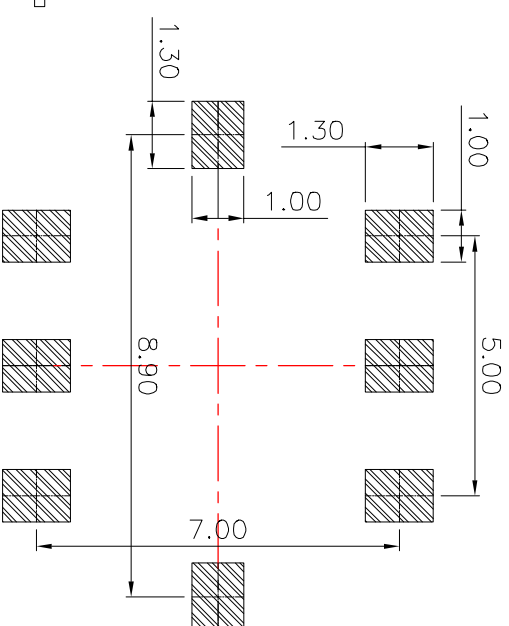
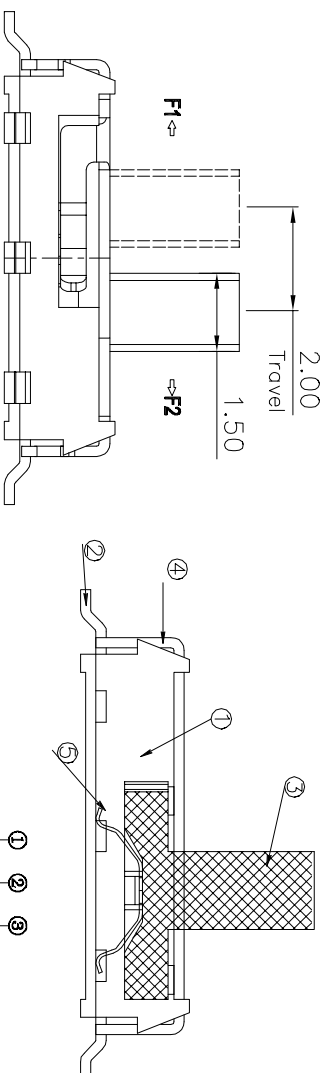
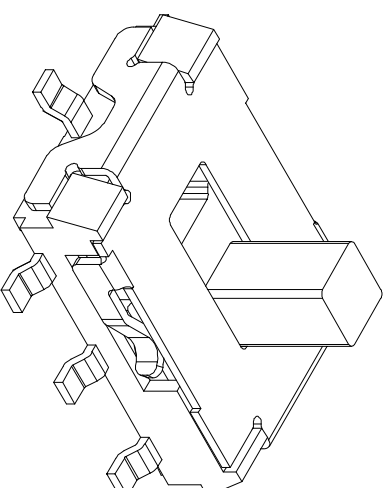


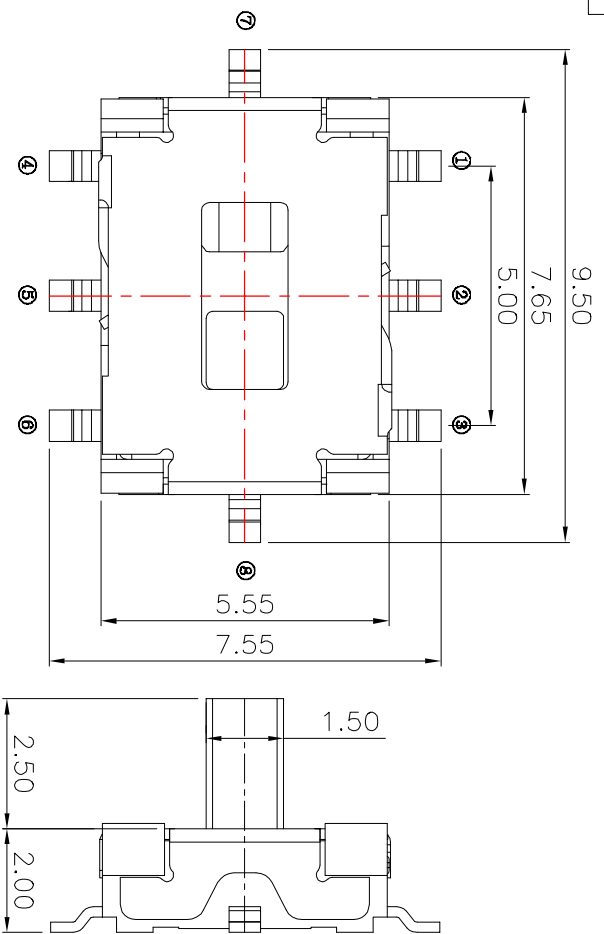

PCB Layout(Pattern side)

Note:

1. Rating : DC 12V 50mA
2. Contact Resistance : $\leq 50m\Omega$
3. Insulation Resistance: DC500V 1Minute
4. Operating Temperature Range: $-25^{\circ}\text{C}+80^{\circ}\text{C}$
5. Ambient Humidity Used: $\leq 85\%\text{RH}$
6. Operating Force : $200\text{gf}\pm 50\text{gf}$
7. Operating Life : 10,000Cycles



Circuit Diagram

⑤	Contact Spring	—	1	Phosphor bronze	Ag Plated	—
④	Cover	—	1	SUS	Natural	—
③	KNOB	—	1	PA10T	Black	—
②	Terminal	—	3	Bross	Ag Plated	—
①	Base	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

[illegible]