


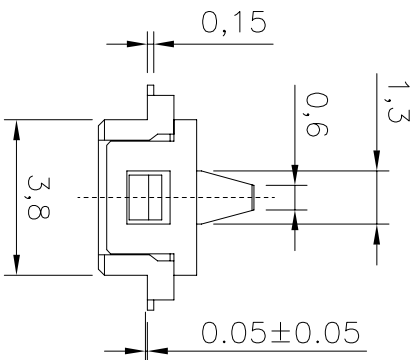



动作方向

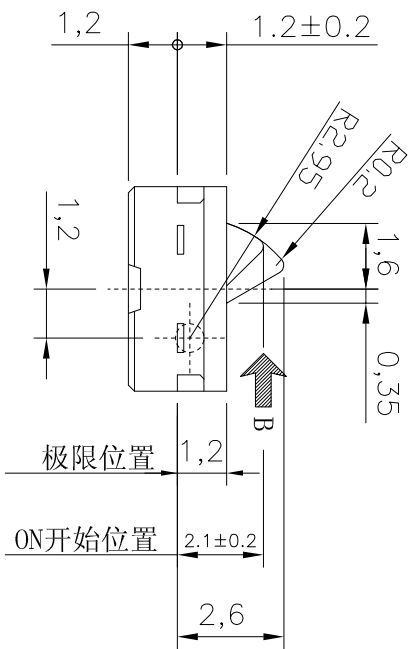

CIRCUIT DIAGRAM

技术要求:

1. 额定负荷: DC 5V 0.1~5mA
2. 绝缘电阻: $\geq 100M\Omega$
3. 耐电压: AC100V 50Hz/1min
4. 电器寿命: 100000次
5. 环境温度: $-10^{\circ} \sim +60^{\circ}$
6. 相对湿度: $40^{\circ}C \leq 95\%$
7. 接触电阻: $\leq 1\Omega$
8. 接触行程: 0.5 ± 0.2
9. 动作力: $\leq 0.3N(31gf)$
10. 各零件无明显飞边, 配合要紧密, 不得有明显松动。

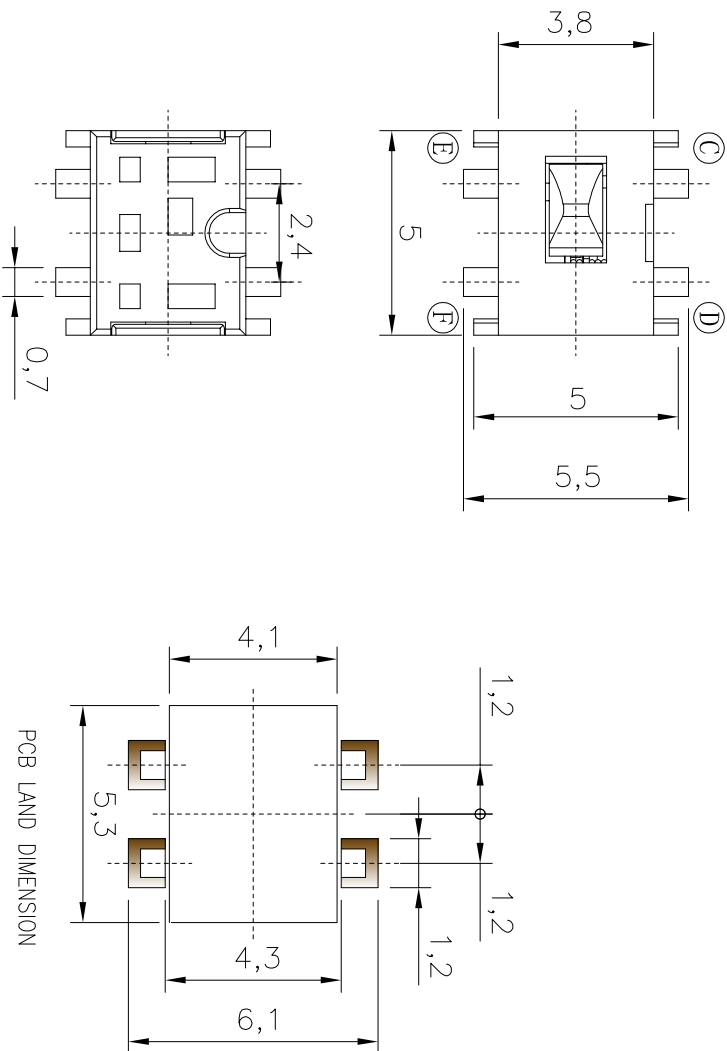

PCB LAND DIMENSION

⑤	Center Spring	—	1	Phosphor Bronze	Au Plated	—
④	Base	—	1	PA	Black	—
③	Terminal	—	4	Phosphor Bronze	Au Plated	—
②	Keystore	—	1	PA	Natural	—
①	Cover	—	1	PA	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD			
DRAWN	S.L.L	2020.1.05				

						CHECKED		TITLE:		DETECTOR SWITCHS	
						APPROVALS		PART NO.		K5-1632FN-01	
						TOLERANCES ARE		ANGLE		UNIT: mm	
						30以上 10~30 5~10 ~5		±0.30 ±0.20 ±0.15 ±0.10		±2°	
								DRAWING NO.		SCALE: 1:1	
										PROJ: 	
											
										SHEET 1 OF 1	