


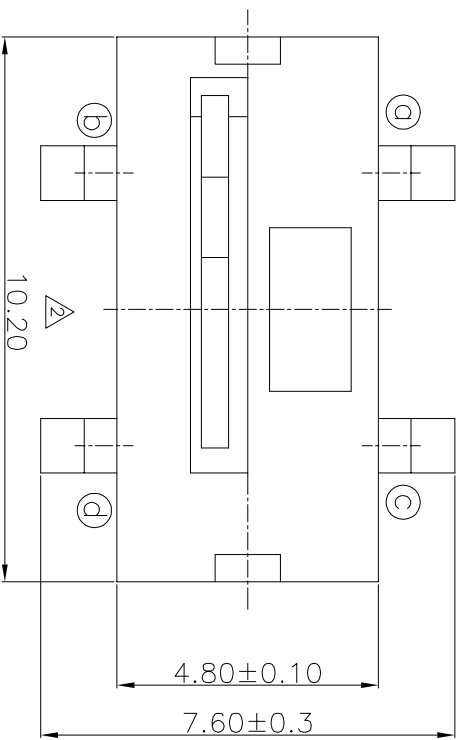


ROHS

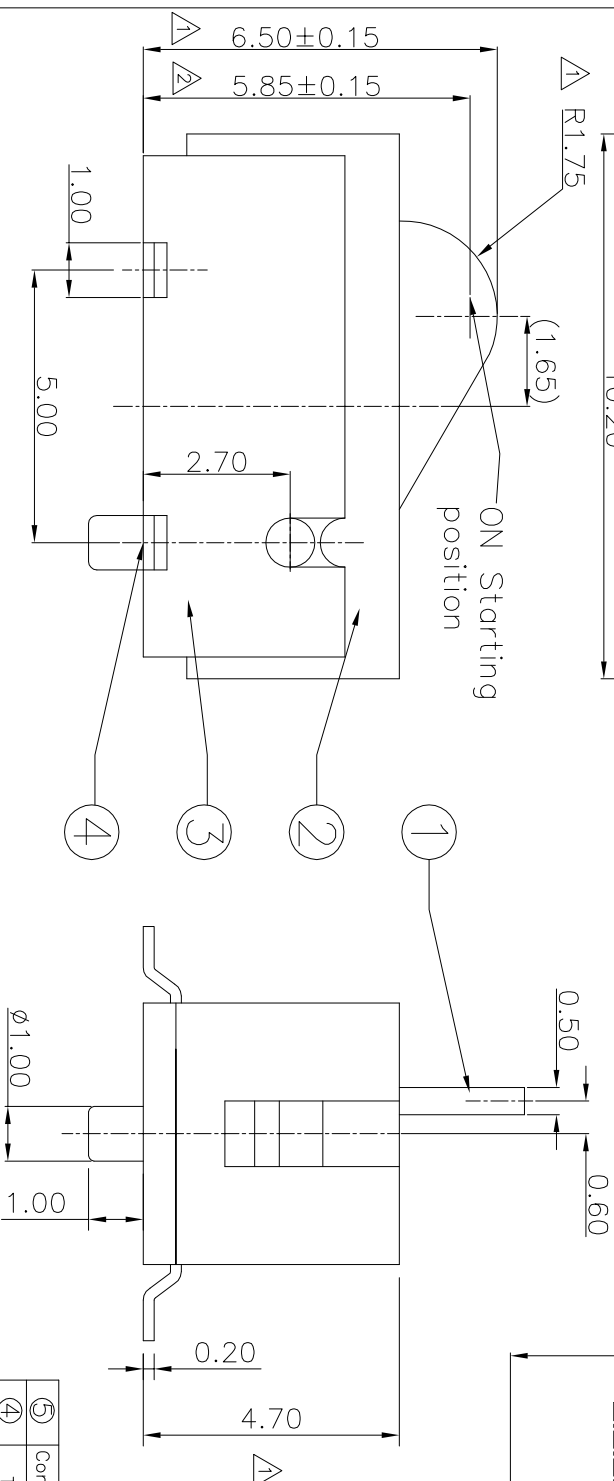

Circuit Diagram

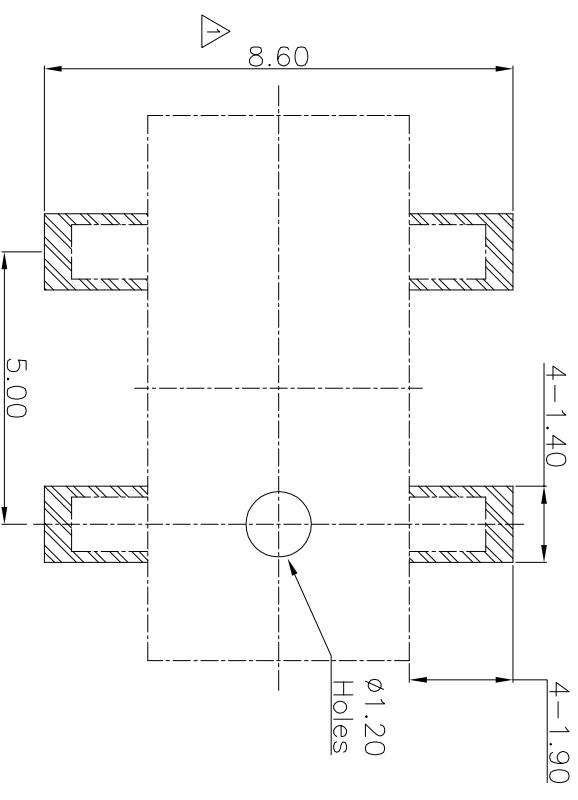



PCB Layout(Pattern side)

PART NO.	
K5-1631SA-02	K5-1631SN-02


ITEM	PART NAME	TER. NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Contact Spring	—	1	Be Alloy	Ag Plated	—
④	Terminal	—	4	Brass	Ag Plated	—
③	Housing	—	1	LCP	Black	—
②	Cover	—	1	LCP	Black	—
①	Slider	—	1	LCP	Black	—

NOTE:
Rating: DC 30V 0.1A
Operating Force: 30 ± 10 gf
Lifetime: 100,000 Cycles



[illegible]

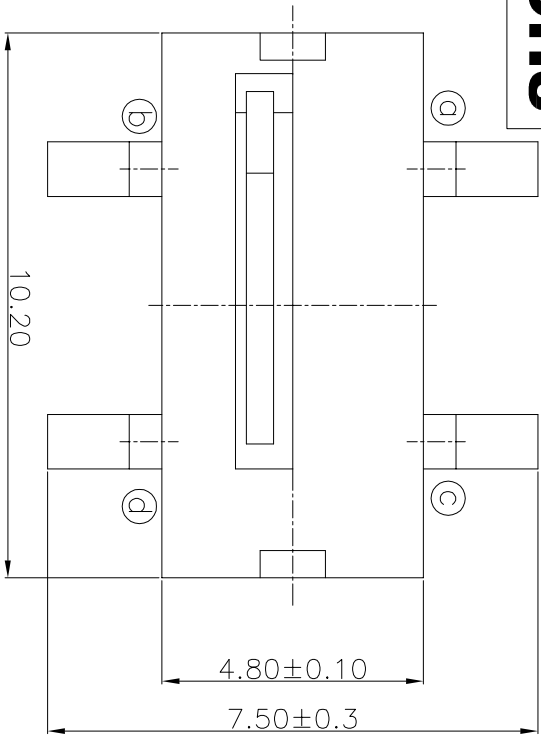

Circuit Diagram

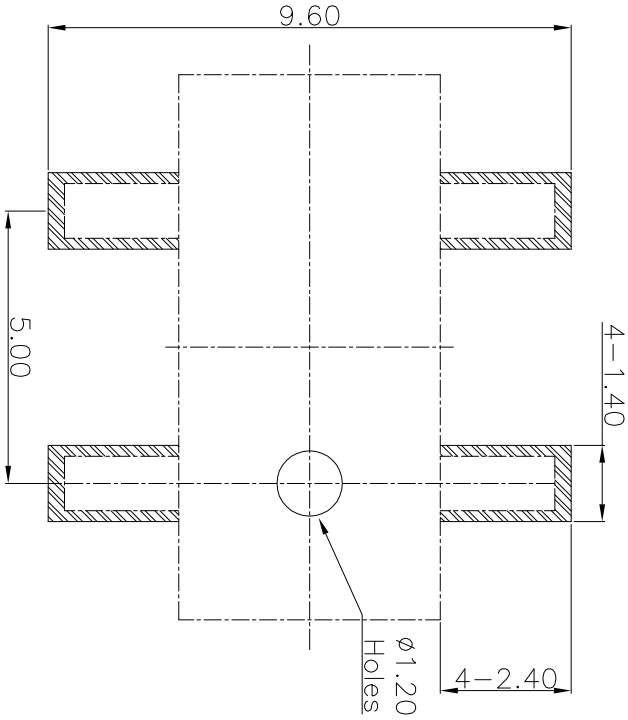

PCB Layout(Pattern side)

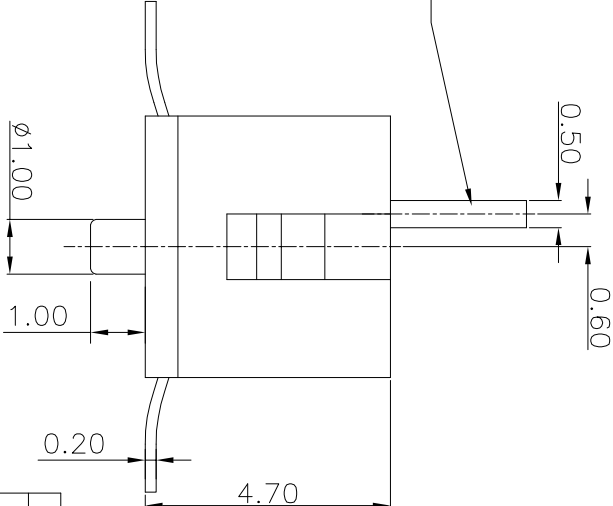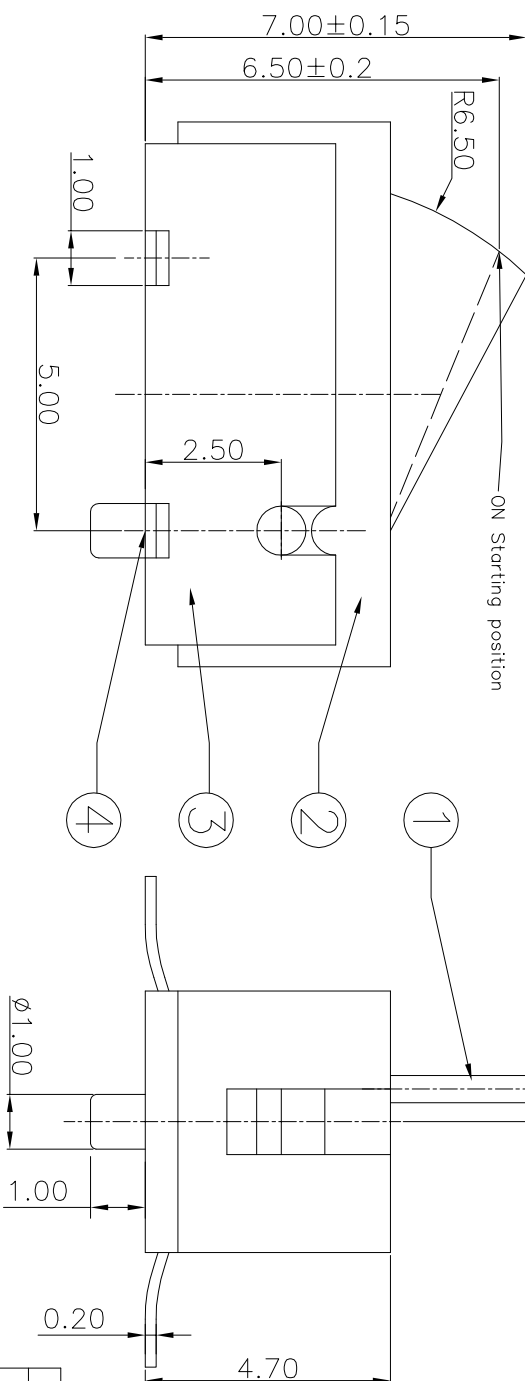

NOTE:
Rating: DC 30V 0.1A
Operating Force: 30 ± 10 gf
Lifetime: 100,000 Cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:		DETECTOR SWITCHS	
DRAWN		S.L.L	2019.9.30		LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
CHECKED						
APPROVALS						
TOLERANCES ARE		30~0.15 10~0.30 5~0.10 ~ 5	±0.30 ±0.20 ±0.15 ±0.10	ANGLE	UNIT: mm	SCALE: 1:1
					DRAWING NO.	PROJ: 1 OF 1

PART NO.	
K5-1631SA-01	K5-1631SN-01