

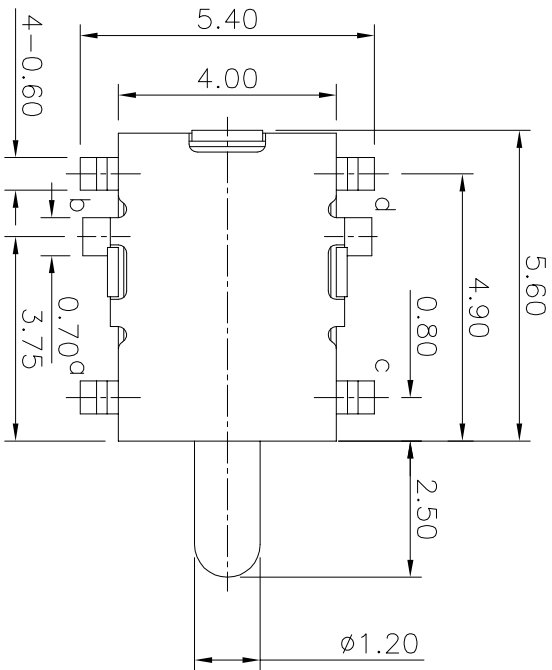
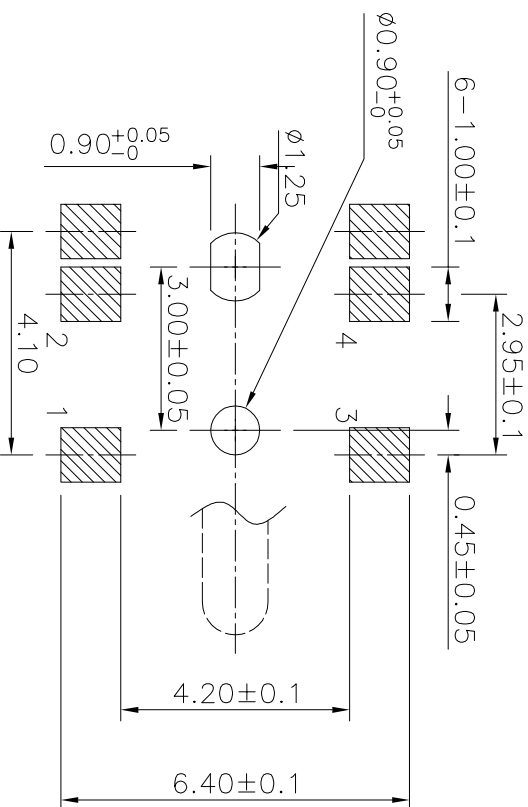


CIRCUIT DIAGRAM


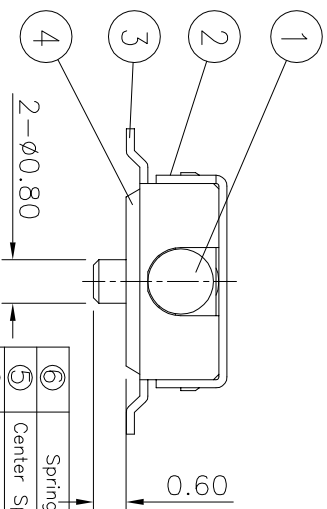


PCB LAND DIMENSION $\Phi 0.05$

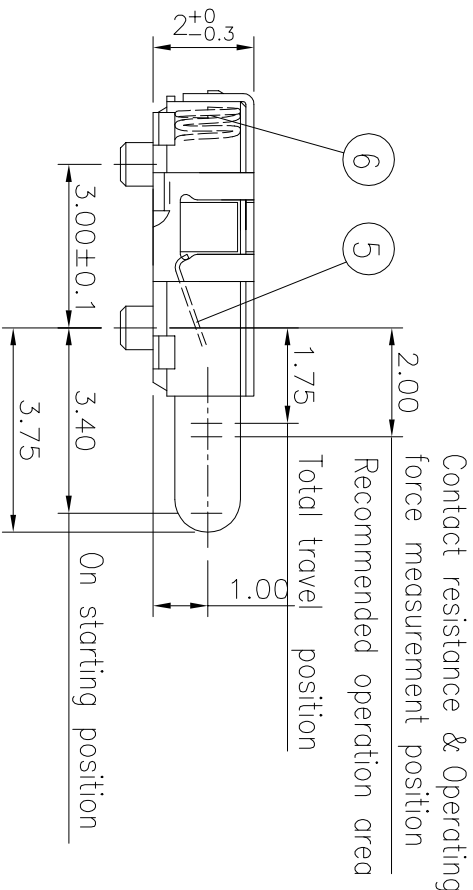


NOTE:
Rating: DC 12V 50mA
Operating Force: 120±30gf
Lifetime: 100,000 Cycles



ROHS

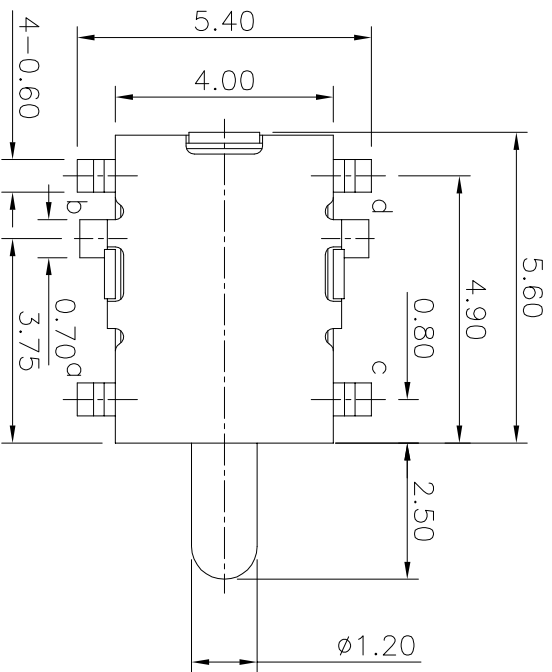

CIRCUIT DIAGRAM

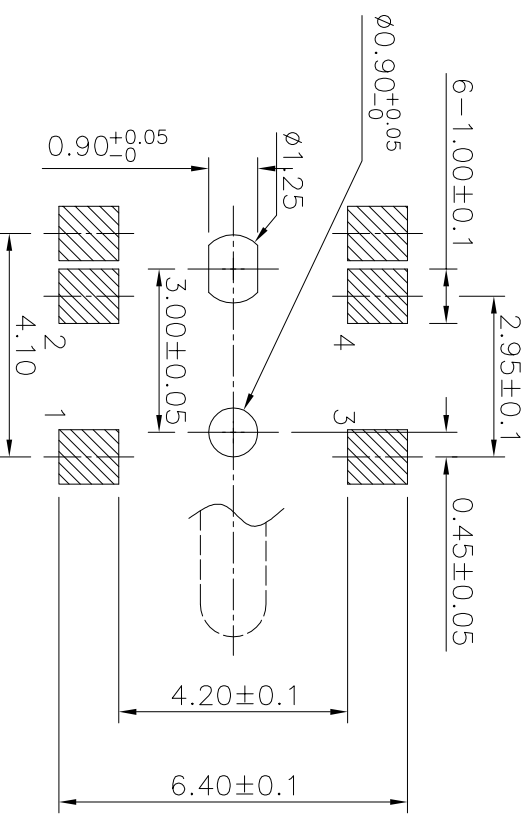

PCB LAND DIMENSION	ϕ	0.05
--------------------	--------	------

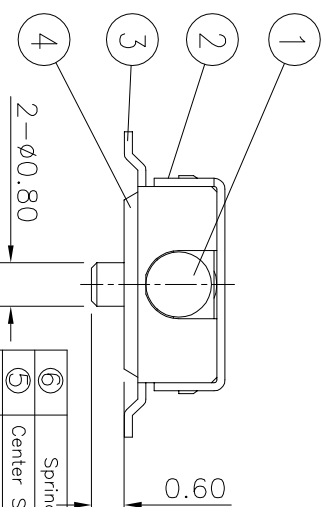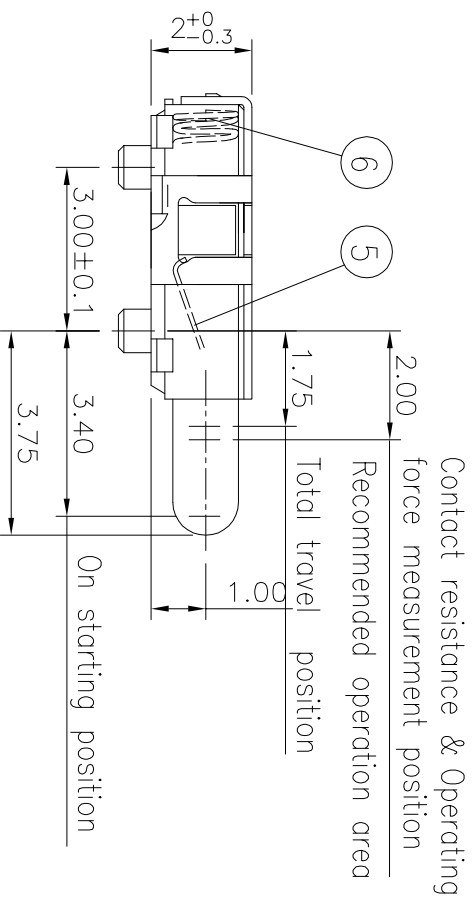

NOTE:
Rating: DC 12V 50mA
Operating Force: 120 ± 30 gf
Lifetime: 100,000 Cycles

Technical drawing of a spring with dimensions:

- Un starting position
- 3.00±0.1
- 3.40
- 3.75
- ④ 2-∅0.80

NOTE:

- Rating: DC 12V 50mA
- Operating Force: 120±30gf
- Lifetime: 100,000 Cycles

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑥	Spring	—	1	SUS	Natural	—
⑤	Center Spring	—	1	Phosphor Bronze	Ag Plated	—
④	Base	—	1	PA46	Black	—
③	Terminal	—	4	Phosphor Bronze	Ag Plated	—
②	Cover	—	1	SUS	Natural	—
①	Knob	—	1	PA46	Black	—

APPROVALS		DATE	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD	
DRAWN	S.L.L	2019.9.30		
CHECKED			TITLE:	DETECTOR SWITCHS
APPROVALS			PART NO.	K5-1624SA-01B
TOLERANCES ARE			UNIT: mm	SCALE: 1:1
30~MAX. 10~30 5~10 ±0.30 ±0.20 ±0.15			ANGLE	PROJ.
~ 5 ±0.10			±2'	DRAWING NO. SHEET 1 OF 1