
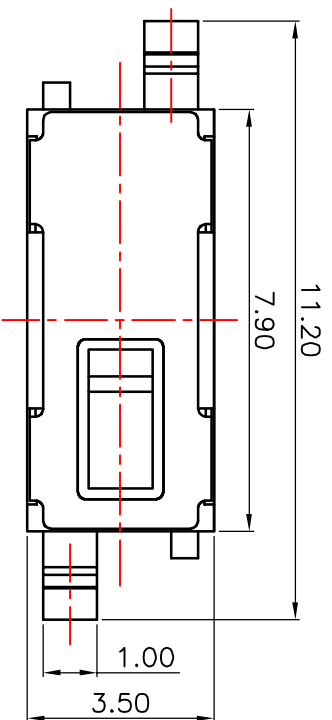
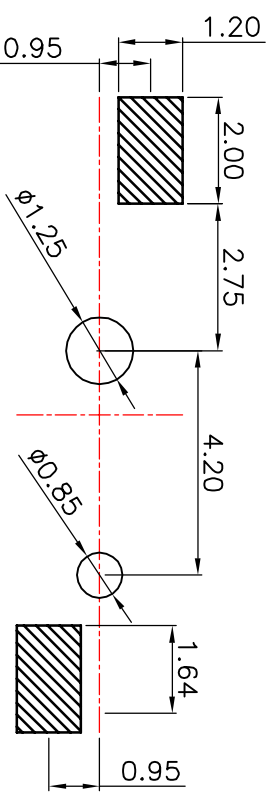
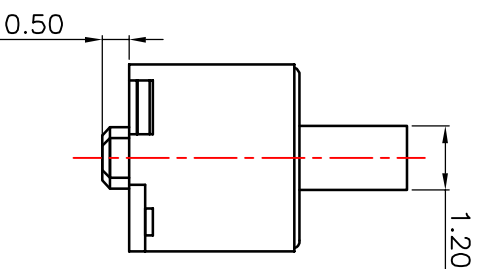
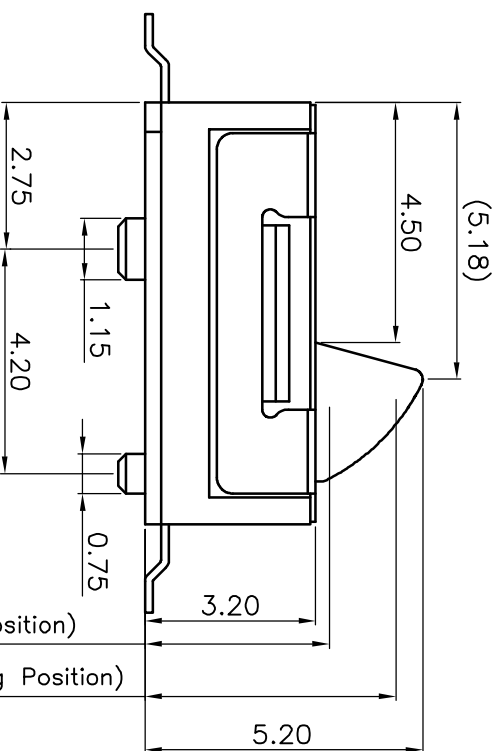


Circuit Diagram

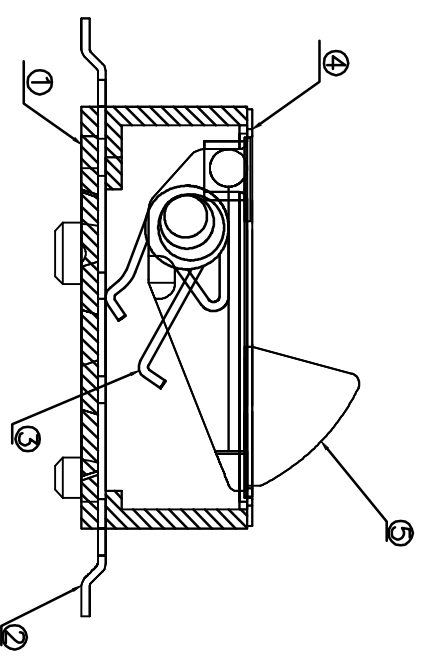

PCB Layout(Pattern side)

Typical Specifications

1. Rating : DC 12V 50mA
2. Contact Resistance: $\leq 100\text{m}\Omega$
3. Insulation Resistance: $\geq 100\text{M}\Omega$ DC500V
4. Operating Temperature Range: $-25^{\circ}\text{C} + 80^{\circ}\text{C}$
5. Ambient Humidity Used: $\leq 85\%\text{RH}$
6. Operating Force : $30\text{gf} \pm 20\text{gf}$,
7. Life : 100,000 Cycles

Typical Specifications									
1.Rating : DC 12V 50mA									
2.Contact Resistance: ≤100mΩ									
3.Insulation Resistance: ≥100mΩ DC500V									
4.Operating Temperature Range: -25℃+80℃									
5.Ambient Humidity Used: ≤85%RH									
6.Operating Force :30gf±20gf,									
7.Life : 100,000 Cycles									
3.45 (Full P									
4.70 (ON Startin									
ECN NO.									
REV.									
DATE.									
NEW									
DESCRIPTION.									
CHANGE.									
CHECK.									
APPRO.									
TOLERANCES ARE									
30 ^{±0.15} ±0.30									
10 ^{±0.10} ±0.20									
5 ^{±0.10} ±0.15									
~ 5 ±2									
DRAWING NO.									
SCALE: 1:1									
PROJ. 									
SHEET 1 OF 1									
DRAWN									
S.L.L.									
2019.9.30									
TITLE:									
DETECTOR SWITCHS									
PART NO.									
K5-1216SA-01									
CHECKED									
APPROVALS									
LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD									