
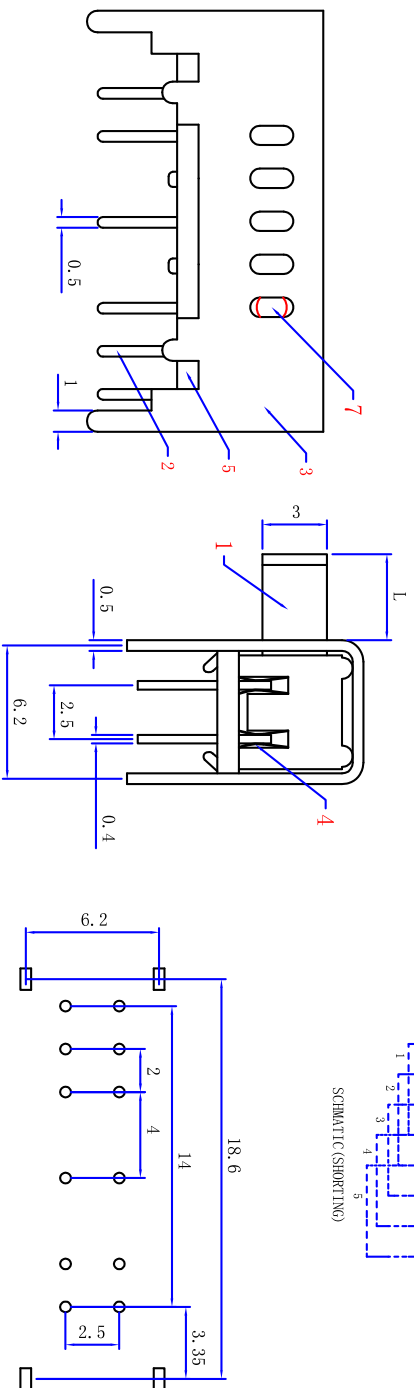



RoHS

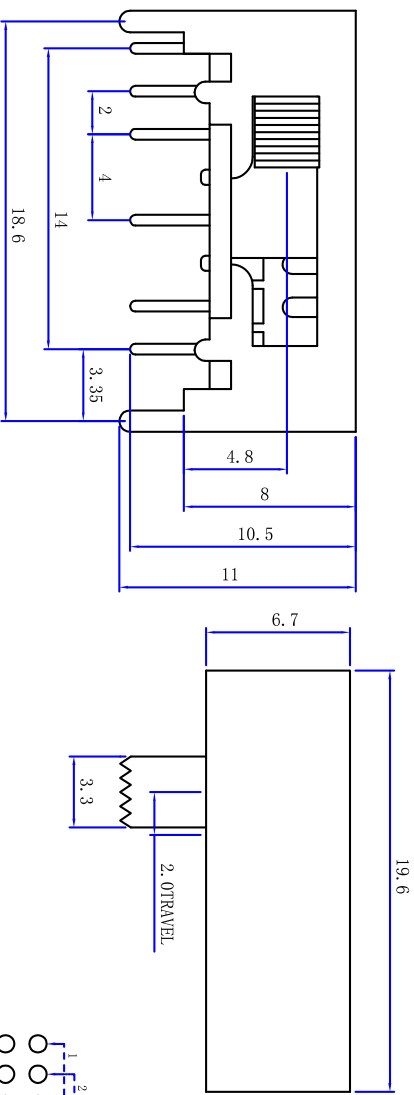

NO. 1	
PART NO	L
	X

Height (高度) :

Main technical specifications:

Rated load(额定负荷) :	DC 50V 30mA
Contact impedance (接触阻抗) :	$\leq 100\Omega$ MAX
Insulation impedance (绝缘阻抗) :	$\geq 100M\Omega$ MIN
TIMING	NON-SHORTING
OPERATING LIFE (电气寿命) :	100,000 cycles
Usage temperature (使用温度) :	-25 °C to 85 °C
CIRCUIT	2P5T
Trip(行程) :	2±0.2mm
Operating force(操作力) :	1 2 3 4 5 6

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

SK-25D01-□

B

A

F

E

D

C

B

A