


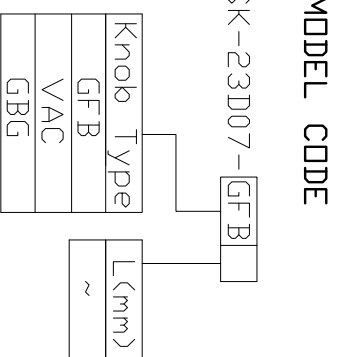


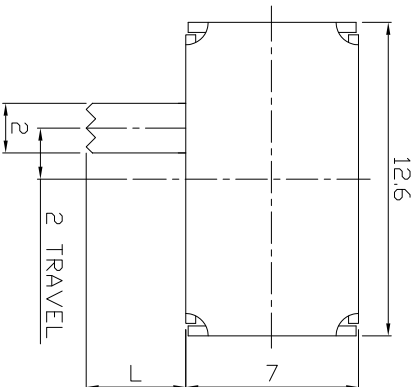
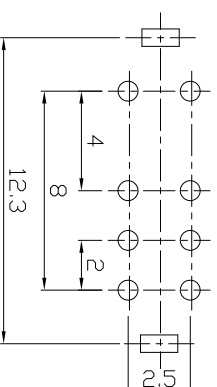


RoHS

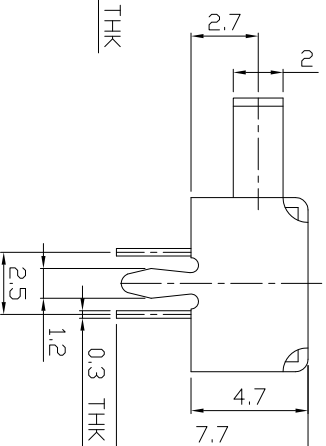

Height (高度) :

NO. 1	L
PART NO	X

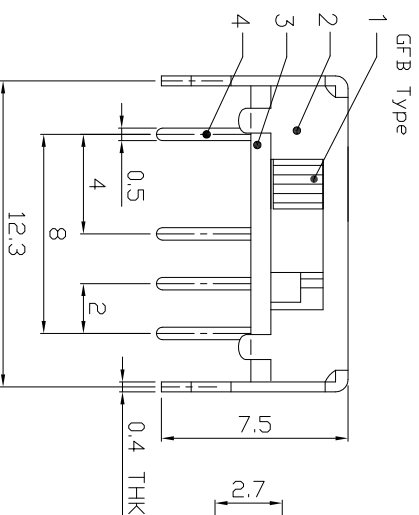

P.C.B LAYOUT
BOTTOM VIEW

public errand (公差) : $\pm 0.2\text{mm}$ unit (单位) : mm

Main technical specifications:

Rated load(额定负荷) :	DC 50V 30mA
Contact impedance (接触阻抗) :	$\leq 100\Omega$ MAX
Insulation impedance (绝缘阻抗) :	$\geq 100M\Omega$ MIN
TIMING	NON-SHORTING
OPERATING LIFE (电气寿命) :	100,000 cycles
Usage temperature (使用温度) :	-25 °C to 85 °C
CIRCUIT	2P3T
Trip(行程) :	2 $\pm$ 0.2mm
Operating force(操作力) :	12
	3
	4
	5
	6

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

SK-23D07-□

B

A

F

E

D

C

B

A