

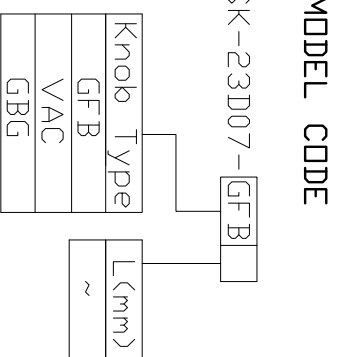




RoHS

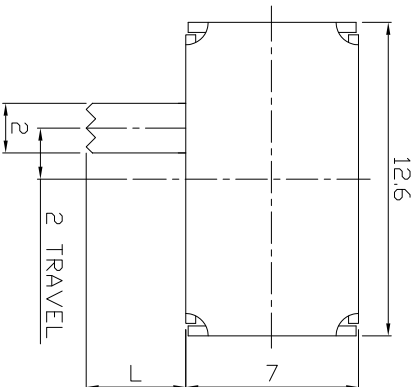



CIRCUIT DIAGRAM

Height (高度) :

|         |   |
|---------|---|
| NO. 1   |   |
| PART NO | L |
|         | X |

Main technical specifications:

|                               |                                                                                                                  |   |   |   |   |   |   |
|-------------------------------|------------------------------------------------------------------------------------------------------------------|---|---|---|---|---|---|
| Rated load(额定负荷) :            | DC 50V 30mA                                                                                                      |   |   |   |   |   |   |
| Contact impedance (接触阻抗) :    | ≤100m Ω MAX                                                                                                      |   |   |   |   |   |   |
| Insulation impedance (绝缘阻抗) : | ≥100M Ω MIN                                                                                                      |   |   |   |   |   |   |
| TIMING                        | NON-SHORTING                                                                                                     |   |   |   |   |   |   |
| OPERATING LIFE (电气寿命) :       | 100,000 cycles                                                                                                   |   |   |   |   |   |   |
| Usage temperature (使用温度) :    | -25 ℃ to 85 ℃                                                                                                    |   |   |   |   |   |   |
| CIRCUIT                       | 2P3T                                                                                                             |   |   |   |   |   |   |
| Trip(行程) :                    | 2±0.2mm                                                                                                          |   |   |   |   |   |   |
| Operating force(操作力) :        | <table><tr><td>1</td><td>2</td></tr><tr><td>3</td><td>4</td></tr><tr><td>5</td><td>6</td></tr></table> 250±100gf | 1 | 2 | 3 | 4 | 5 | 6 |
| 1                             | 2                                                                                                                |   |   |   |   |   |   |
| 3                             | 4                                                                                                                |   |   |   |   |   |   |
| 5                             | 6                                                                                                                |   |   |   |   |   |   |

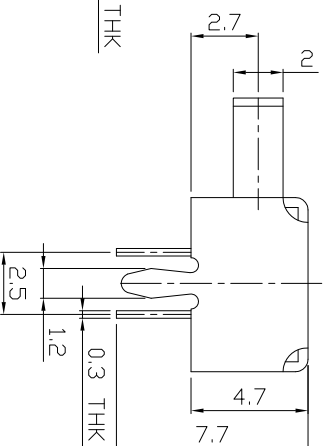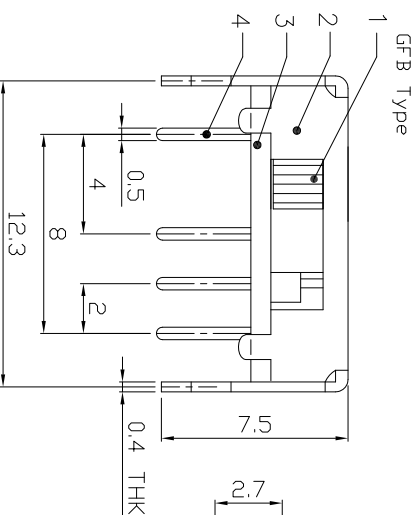

P.C.B LAYOUT  
BOTTOM VIEW

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

SK-23D07-□

B

A

F

E

D

C

B

A