
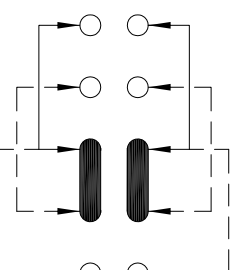

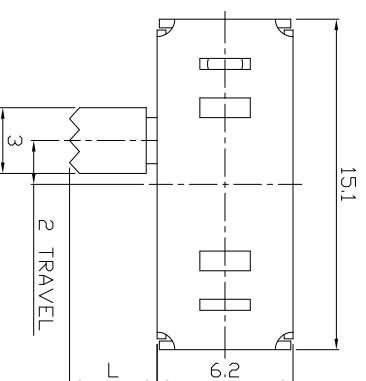


MODEL CODE

SK-23D06-GEI






CIRCUIT DIAGRAM

Height (高度) :

NO. 1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷) :	DC 50V 30mA
Contact impedance (接触阻抗) :	≤100m Ω MAX
Insulation impedance (绝缘阻抗) :	≥100M Ω MIN
TIMING	NON-SHORTING
OPERATING LIFE (电气寿命) :	100,000 cycles
Usage temperature (使用温度) :	-25 ℃ to 85 ℃
CIRCUIT	2P3T
Trip(行程) :	2±0.2mm
Operating force(操作力) :	1 2 3 4 5 6
	250±100gf

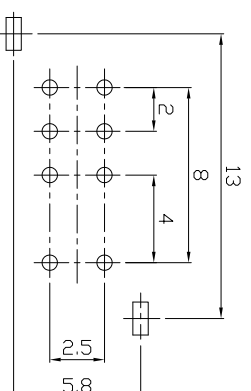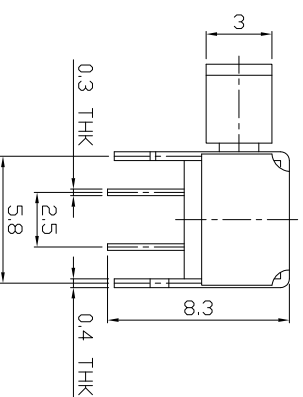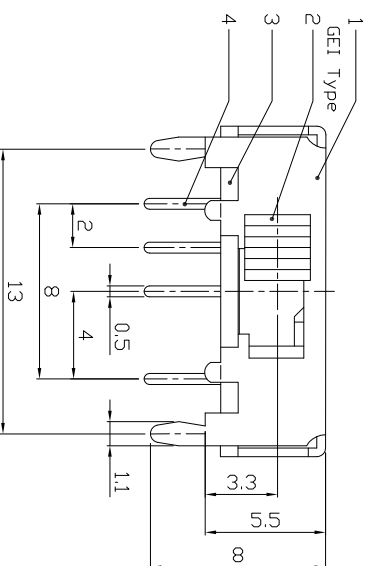

P.C.B LAYOUT
BOTTOM VIEW

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.