
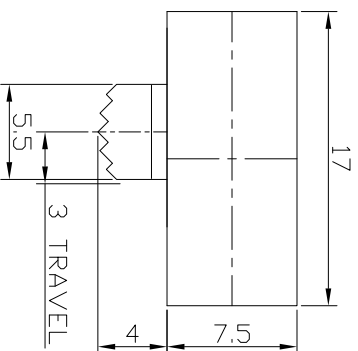

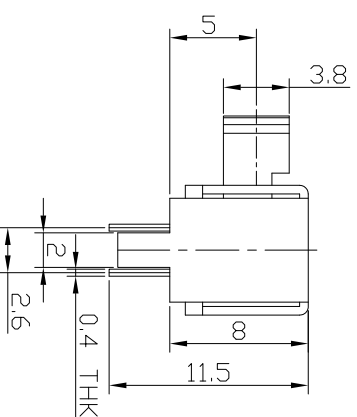


Height (高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷) :	DC 50V 30mA	
Contact impedance (接触阻抗) :	≤100m Ω MAX	
Insulation impedance (绝缘阻抗) :	≥100M Ω MIN	
TIMING	NON-SHORTING	
OPERATING LIFE (电气寿命) :	100,000 cycles	
Usage temperature (使用温度) :	-25 ℃ to 85 ℃	
CIRCUIT	2P2T	
Trip(行程) :	2±0.2mm	
Operating force(操作力) :	1	2
	3	4
	5	6

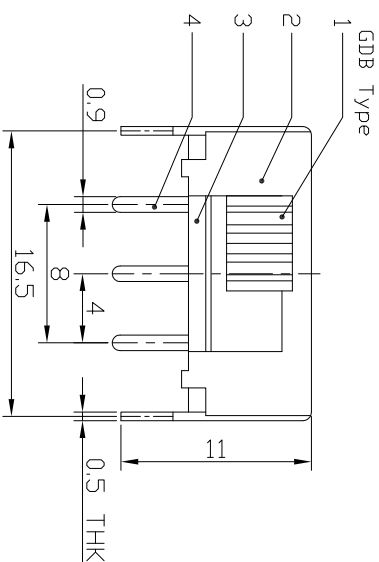

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

SK-22F12-□

B

A

F

E

D

C

B

A