




RoHS

1

2



3

4

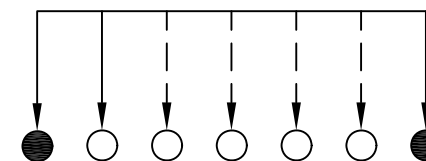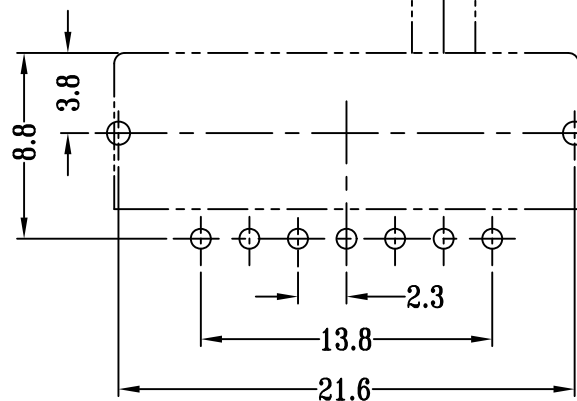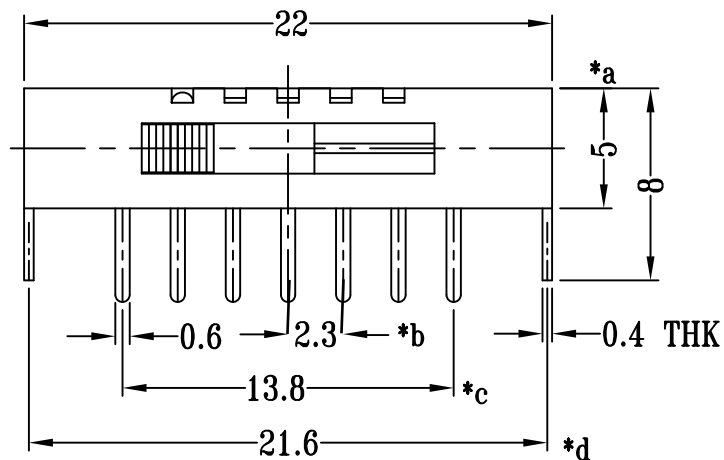

SCHEMATIC (SHORTING)

P.C.B LAYOUT

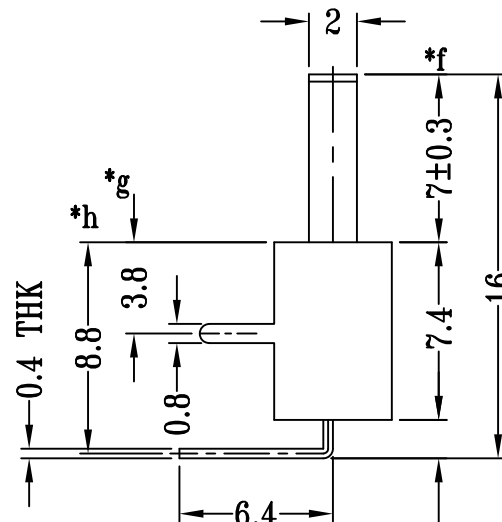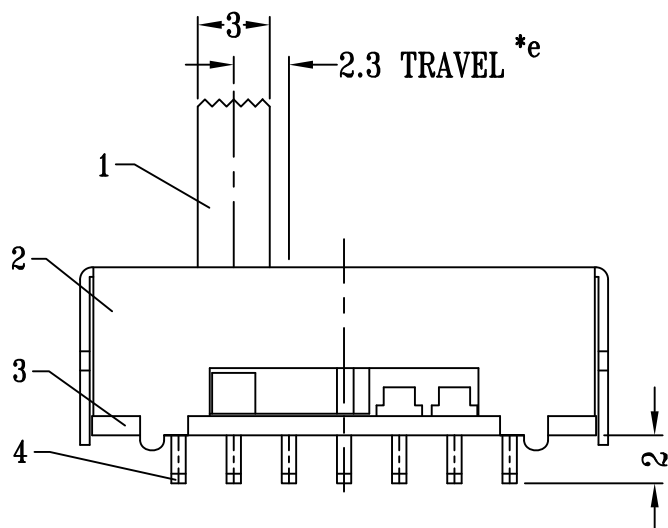

Height(高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A
Contact impedance(接触阻抗):	≤100mΩMAX
Insulation impedance(绝缘阻抗):	≥100MΩMIN
TIMING	NON-SHORTING
OPERATING LIFE (电气寿命):	100,000 cycles
Usage temperature (使用温度):	-25 °C to 85 °C
CIRCUIT	1P5T
Trip(行程):	2.3±0.2mm
Operating force(操作力):	1 2 3 4 5 6 250±100gf

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	SK-15E01			CHECK	Z.LIU	REV.	A1
UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL		DATE	SK-09-2019
mm	OTHERWISE	ABOVE 5 ~30	±0.3	SCALE	2:1	PAGE	1 OF 1
		ABOVE 30	±0.5				
		ANGLE	±3°				

SK-15E01-□