



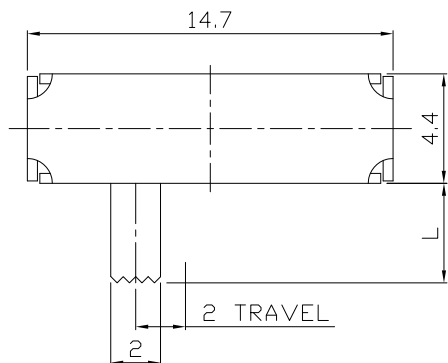


RoHS





MODEL CODE

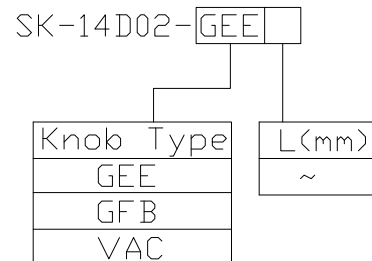

CIRCUIT DIAGRAM

Height(高度) :

NO.1	
PART NO	L
	X

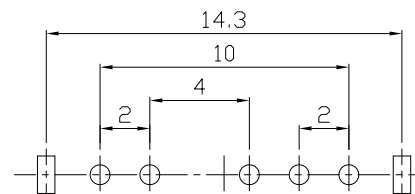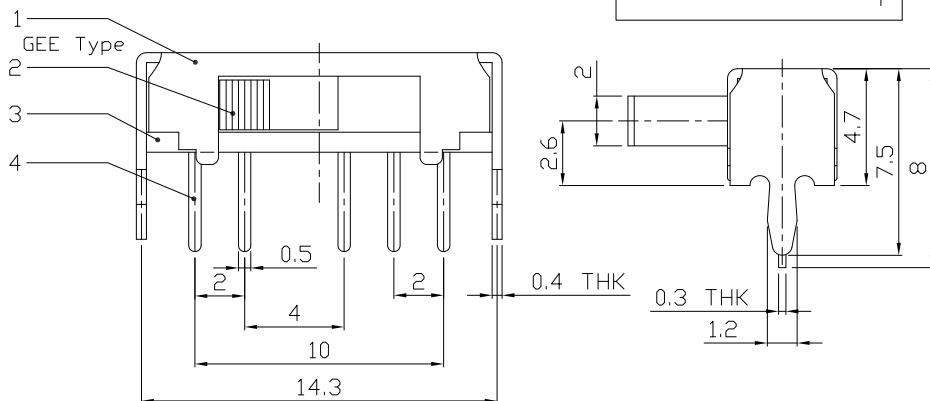

P.C.B LAYOUT
BOTTOM VIEW

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A
Contact impedance(接触阻抗):	≤ 100mΩ MAX
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN
TIMING	NON-SHORTING
OPERATING LIFE (电气寿命):	100,000 cycles
Usage temperature (使用温度):	-25 to 85
CIRCUIT	1P4T
Trip(行程):	2 ± 0.2mm
Operating force(操作力):	1 2 3 4 250 ± 100g 5 6

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	SK-14D02			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	SK-09-2019
	mm	OTHERWISE	ABOVE 5 ~ 30	±0.3			
			ABOVE 30	±0.5	SCALE	PAGE	1 OF 1
			ANGLE	0°±3'			

SK-14D02-□