

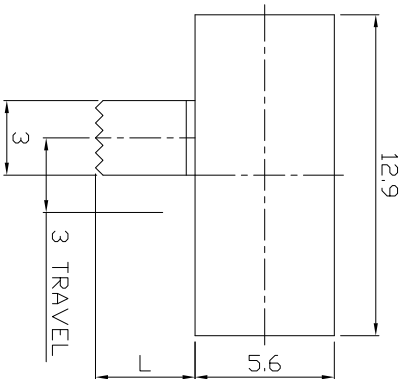


RoHS


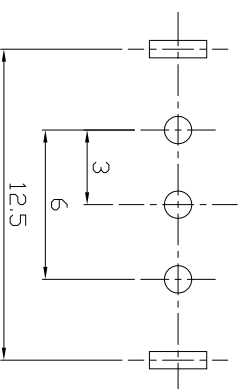


MODEL CODE

SK-12F14-GFI



P.C.B LAYOUT
BOTTOM VIEW

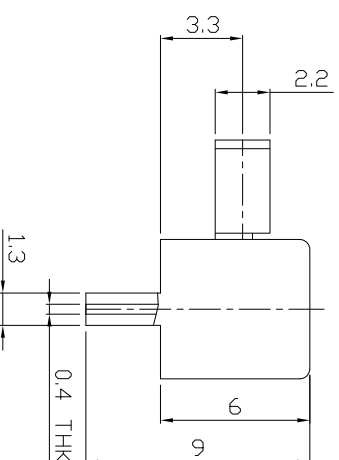

CIRCUIT DIAGRAM

Height (高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷) :		DC 50V 30mA	
Contact impedance (接触阻抗) :		≤100m Ω MAX	
Insulation impedance (绝缘阻抗) :		≥100M Ω MIN	
TIMING		NON-SHORTING	
OPERATING LIFE (电气寿命) :		100,000 cycles	
Usage temperature (使用温度) :		-25 ℃ to 85 ℃	
CIRCUIT		2P2T	
Trip(行程) :		2±0.2mm	
Operating force(操作力) :		1	2
		3	4
		5	6
		250±100gf	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D

SK-12F14-GFI

B

A

F

E

D

C

B

A