



RoHS
Compliant
2002/95/EC





MODEL CODE

SS-42D02-GEE

Knob Type
GEE
VAC



L(mm)
~

DIMENSIONS

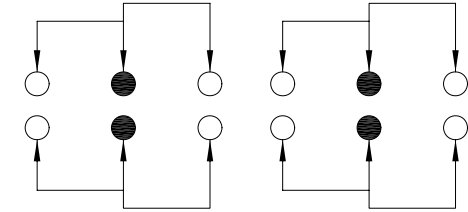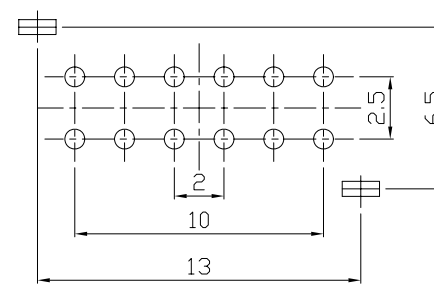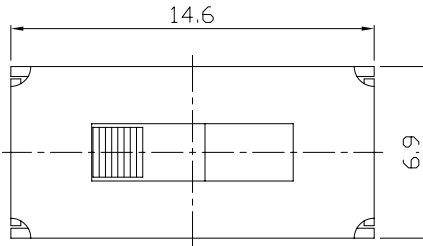

P.C.B LAYOUT
BOTTOM VIEW

CIRCUIT DIAGRAM

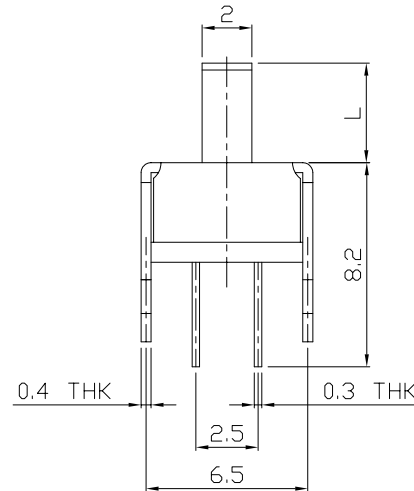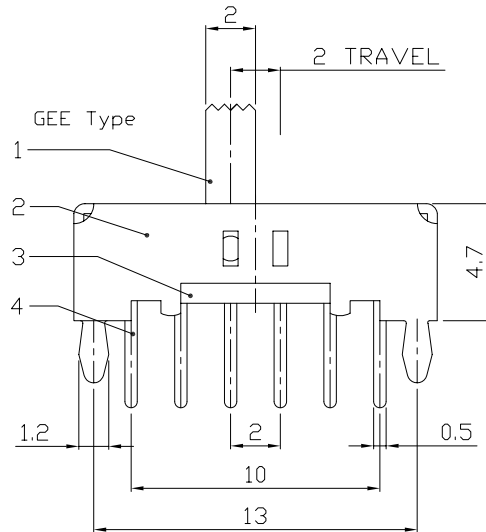

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD												
7					OVER 1.5mm: ±0.2mm	MAT'L													
6	SPRING PLATE	STAINLESS STEEL	2	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-42D02										
5	CONTACT CLIP	PBS C5210R-EH	4	Ag CLAD															
4	TERMINAL	BRASS STRIP	12	Ag PLATED OVER Ni PLATED			FINISH		DR: 2015/06/10 DWG NO.: ADJ-42D02										
3	BASE	PHENOLIC RESIN	1	NATURAL			SEE NOTE												
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY		CHKD: 2015/06/10		SCALE 3:1			SHEET 1/1		REV. A		CUSTOMER DRAWING	
1	KNOB	POM	1	BLACK															
NO.	PARTS	MATERIAL	Q'TY	FINISHING					APPD:										