

RoHS

MODEL CODE

SS-25D01- GET

Knob Type	L(mm)
GET	~

CIRCUIT DIAGRAM

P.C.B LAYOUT
BOTTOM VIEW

Height(高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷) :	DC 50V 0.3A		
Contact impedance(接触阻抗) :	≤100mΩMAX		
Insulation impedance(绝缘阻抗) :	≥100MΩMIN		
TIMING	NON-SHORTING		
OPERATING LIFE (电气寿命):	100,000 cycles		
Usage temperature (使用温度) :	-25 °C to 85 °C		
CIRCUIT	2P5T		
Trip(行程):	2±0.2mm		
Operating force(操作力):	1	2	250±100gf
	3	4	
	5	6	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY	
PART NO.		SS-25D01		CHECK	Z.LIU	REV.	A1	
	UNIT :	TOLERANCE	UP TO 5	±0.2	APPROVAL	DATE	SS-09-2019	
	mm	OTHERWISE	ABOVE 5 ~30	±0.3				
			ABOVE 30	±0.5	SCALE		1 OF 1	
			ANGLE	±3°	2:1			
				PAGE				

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

F

E

D


SS-25D01-□

B




A

```

graph TD
    A[SS-25D01- GET] --- B[Knob Type  
GET]
    A --- C[L(mm)  
~]
  
```



CIRCUIT DIAGRAM

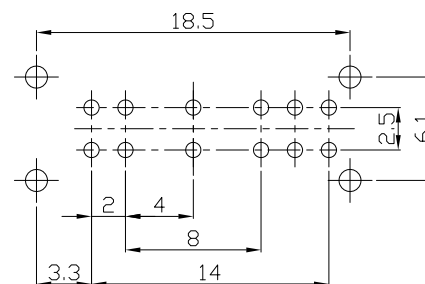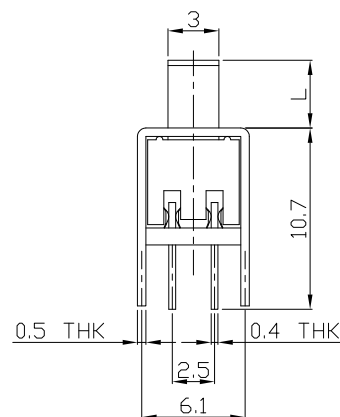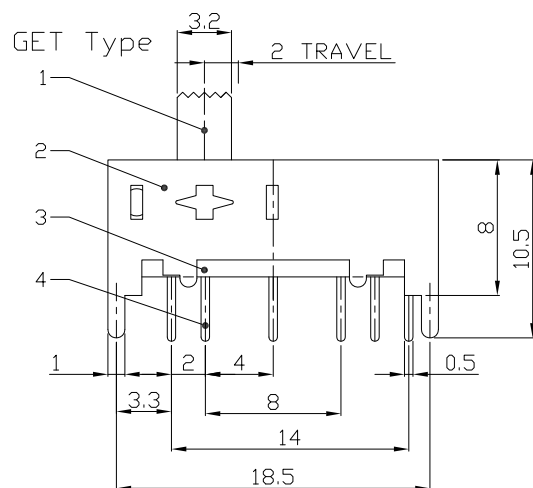

P.C.B LAYOUT
BOTTOM VIEW

Height (高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load (额定负荷):	DC 50V 0.3A		
Contact impedance (接触阻抗):	≤100mΩ MAX		
Insulation impedance (绝缘阻抗):	≥100MΩ MIN		
TIMING	NON-SHORTING		
OPERATING LIFE (电气寿命):	100,000 cycles		
Usage temperature (使用温度):	-25 °C to 85 °C		
CIRCUIT	2P5T		
Trip (行程):	2±0.2mm		
Operating force (操作力):	1	2	
	3	4	250±100gf
	5	6	

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH				DRAWING		G.L CHEN		DWG.No.		LCZY	
PART NO.		SS-25D01				CHECK		Z.LIU		REV.		A1	
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL			DATE		SS-09-2019		
	mm		ABOVE 5 ~30	±0.3		0°±3°	SCALE	2:1		PAGE		1 OF 1	

SS-25D01-☐

B

A