





RoHS
Compliant
2002/95/EC

MODEL CODE

SS-24D02-GEE


REV.	ECN.	NO.	APPD.

DIMENSIONS

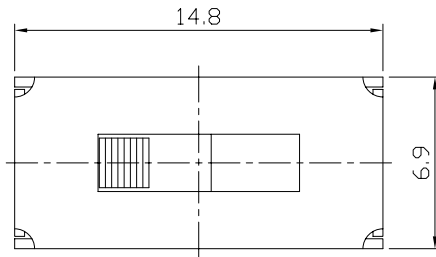


Knob Type
GEE
VAC



L(mm)
~

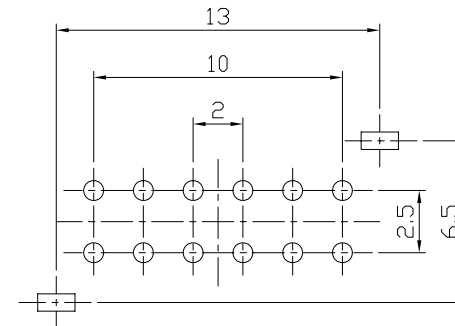

P.C.B LAYOUT
BOTTOM VIEW

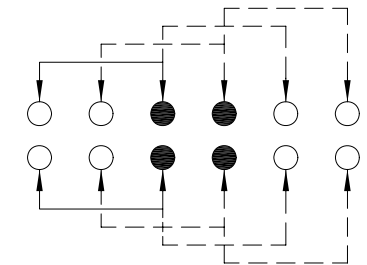

CIRCUIT DIAGRAM

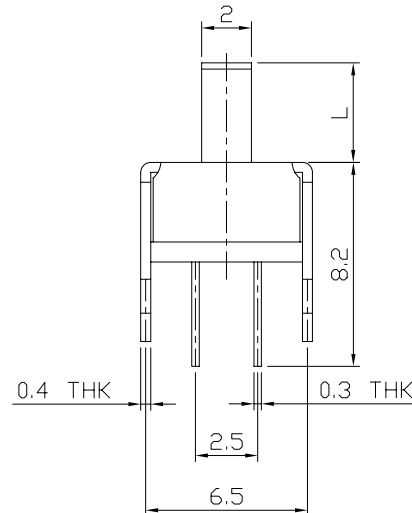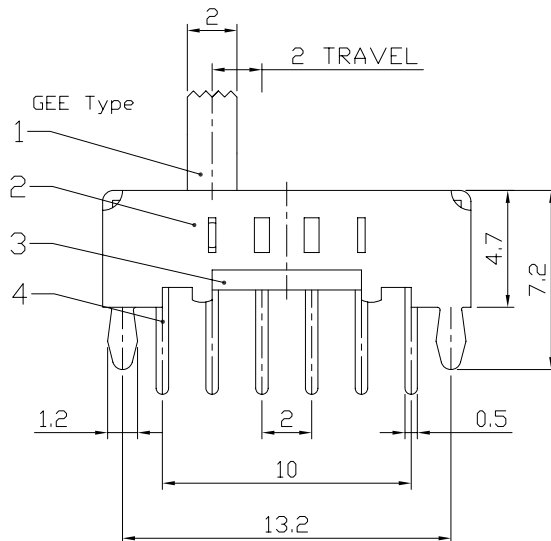

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P4T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD					
7					OVER 1.5mm: ±0.2mm	MAT'L							
6	SPRING PLATED	SUS	1	NATURAL		SEE NOTE		TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-24D02			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED									
4	TERMINAL	BRASS STRIP	12	Ag PLATED		FINISH		DR: 2015/05/29		DWG NO.: ADL-24D02			
3	BASE	PHENOLIC RESIN	1	NATURAL		SEE NOTE							
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY		CHKD: 2015/05/29		SCALE			
1	KNOB	POM	1	BLACK									
NO.	PARTS	MATERIAL	Q'TY	FINISHING				APPD:		3:1	1/1	A	CUSTOMER DRAWING