

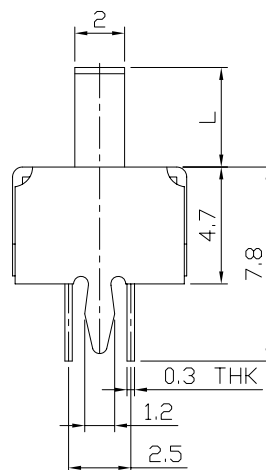
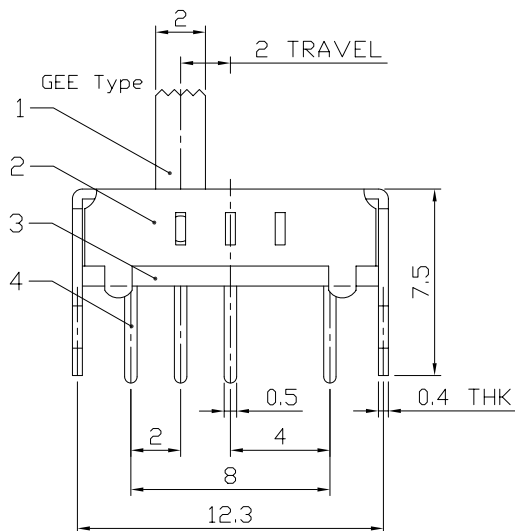




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

DIMENSIONS

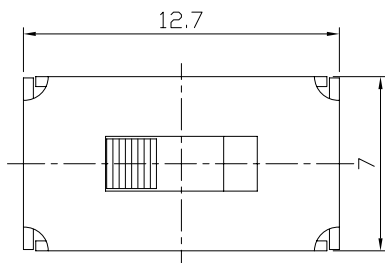


MODEL CODE


SS-23D06-GEE

Knob Type
GEE
VAC

L(mm)
~

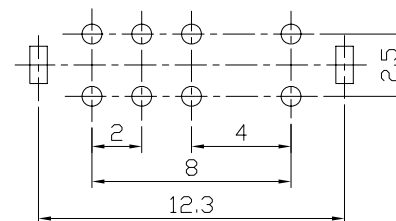

P.C.B LAYOUT
BOTTOM VIEW




CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD					
7					OVER 1.5mm: ±0.2mm	MAT'L						
6	SPRING PLATED	PBS STRIP	1	NATURAL		SEE NOTE	TITLE:		PART NO:			
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED			SLIDE SWITCH / VERTICAL		SS-23D06			
4	TERMINAL	BRASS STRIP	8	Ag PLATED			FINISH	DR: 2015/05/28		DWG NO:		
3	BASE	PHENOLIC RESIN	1	NATURAL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	SEE NOTE	CHKD: 2015/05/28		ADL-23D06			
2	FRAME	STEEL STRIP	1	Ni PLATED		Q'TY						
1	KNOB	POM	1	BLACK					SCALE	SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING				APPD:		7/2	1/1	A

THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF ACCURATE INNOTECH INC
AND SHALL NOT BE REPRODUCED, COPIED
OR USED IN ANY MANNER WITHOUT THE
PRIOR WRITTEN CONSENT OF ACCURATE
INNOTECH INC.