



RoHS
Compliant
2002/95/EC




MODEL CODE

SS-22F04-GBG


Knob Type
GBG
VAA

L(mm)
~



DIMENSIONS

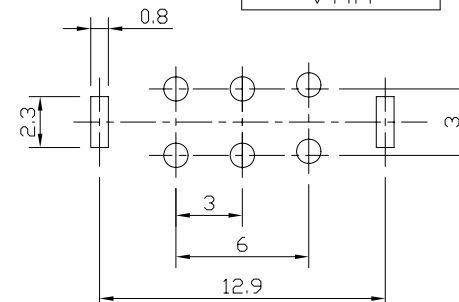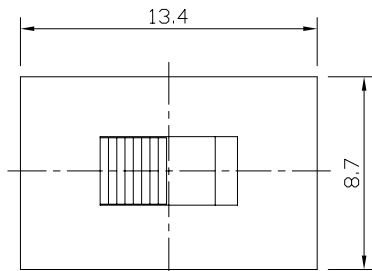

P.C.B LAYOUT
BOTTOM VIEW



CIRCUIT DIAGRAM

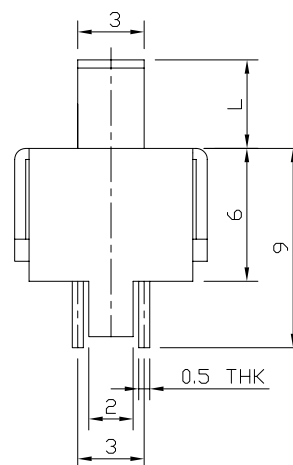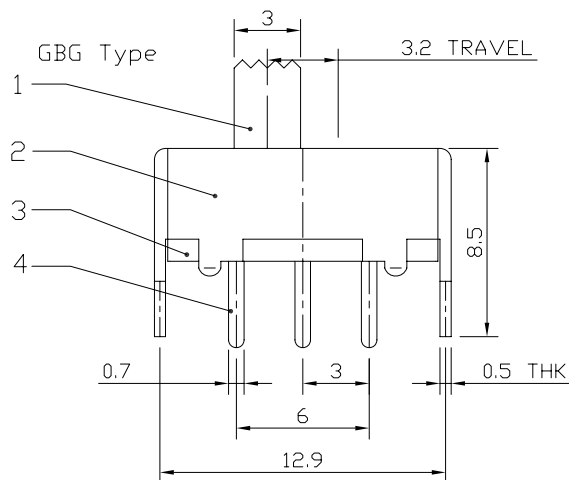

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.5A 50V DC
CIRCUIT	2P2T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NO SHORTING
TRAVEL	3.2mm
OPERATING FORCE	180±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS mm	LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD					
7					OVER 1.5mm: ±0.2mm	MAT'L						
6	SPRING	STEEL WIRE	2	NATURAL		SEE NOTE	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-22F04			
5	CONTACT	BRASS STRIP	2	Ag PLATED			DR: 2015/05/26		DWG NO.: ADL-22F04			
4	TERMINAL	BRASS STRIP	6	Ag PLATED			CHKD: 2015/05/26		SCALE	SHEET	REV.	CUSTOMER DRAWING
3	BASE	PHENOLIC RESIN	1	NATURAL			APPD:		3:1	1/1	A	
2	FRAME	STEEL STRIP	1	Ni PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.	Q'TY						
1	KNOB	POM	1	BLACK								
NO.	PARTS	MATERIAL	Q'TY	FINISHING								