



RoHS






MODEL CODE

SS-22E01-GFE	
Knob Type	L(mm)
GFE	~



CIRCUIT DIAGRAM

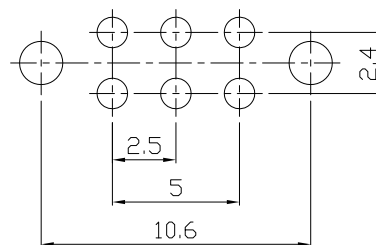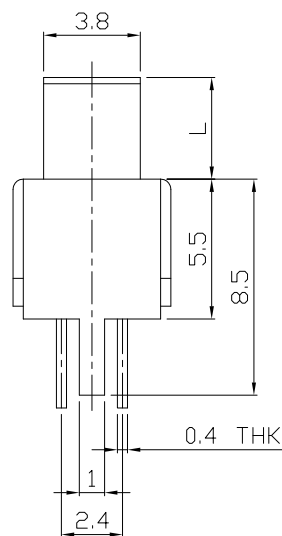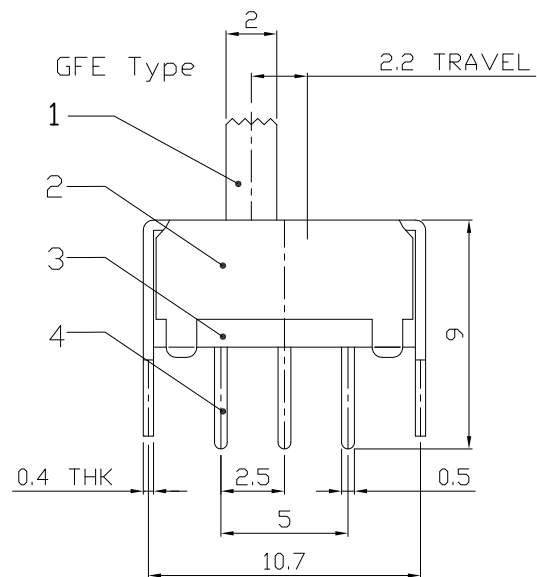

P.C.B LAYOUT
BOTTOM VIEW

Height(高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.5A
Contact impedance(接触阻抗):	$\leq 100m\Omega$ MAX
Insulation impedance(绝缘阻抗):	$\geq 100M\Omega$ MIN
TIMING	NON-SHORTING
OPERATING LIFE (电气寿命):	100,000 cycles
Usage temperature (使用温度):	-25 to 85
CIRCUIT	2P2T
Trip(行程):	2.2 $\pm$ 0.2mm
Operating force(操作力):	1 2 3 4 200 $\pm$ 100g 5 6

public errand (公差) : $\pm 0.2mm$ unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH	DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	SS-22E01	CHECK	Z.LIU	REV.	A1
UNIT : mm	TOLERANCE OTHERWISE	APPROVAL	DATE	SS-09-2019	
	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	SCALE	PAGE	1 OF 1	
	± 0.2 ± 0.3 ± 0.5 $\pm 3^\circ$				

SS-22E01-□