

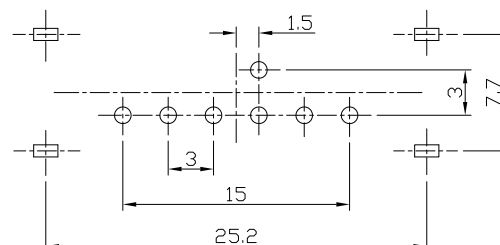


RoHS

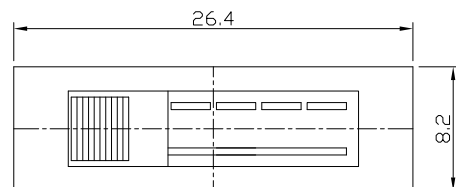




P.C.B LAYOUT
BOTTOM VIEW

MODEL CODE



Height(高度) :

NO.1	
PART NO	L
	X

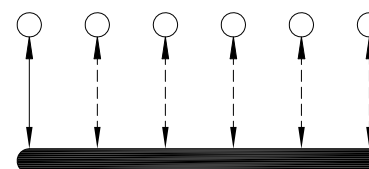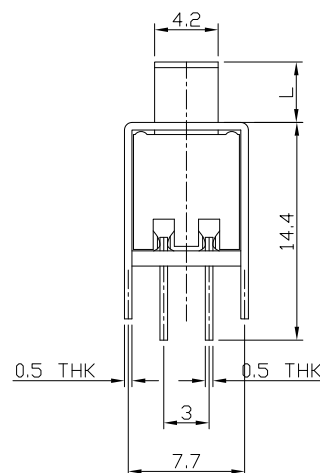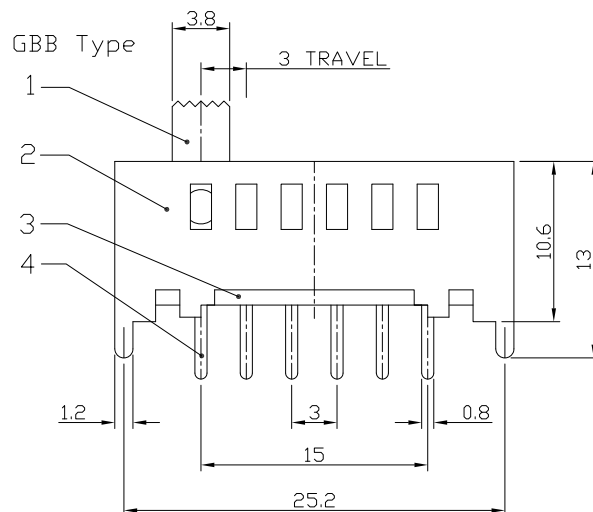

CIRCUIT DIAGRAM

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.5A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
TIMING	NON-SHORTING		
OPERATING LIFE (电气寿命):	100,000 cycles		
Usage temperature (使用温度):	-25 to 85		
CIRCUIT	1P6T		
Trip(行程):	3 ± 0.2mm		
Operating force(操作力):	1	2	300 ± 100g
	3	4	
	5	6	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME	SWITCH			DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.	SS-16F03			CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE	UP TO 5	APPROVAL	DATE	PAGE	SS-09-2019
	mm	OTHERWISE	ABOVE 5 ~ 30				
			ABOVE 30	SCALE	2:1		1 OF 1
			ANGLE				
			0°±3'				

SS-16F03-□