

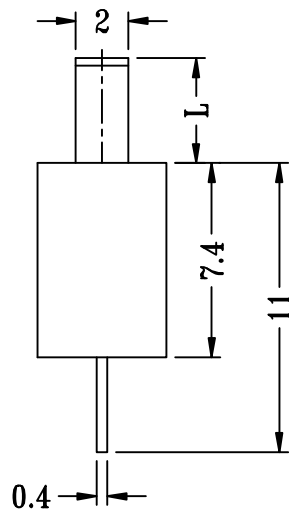


RoHS

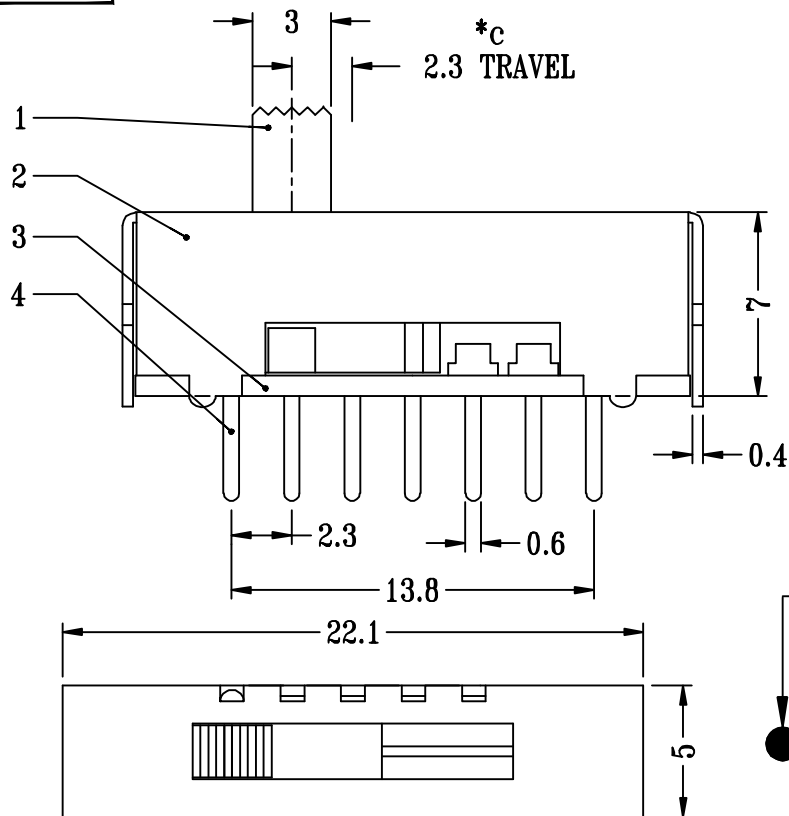

P.C.B LAYOUT
BOTTOM VIEW

Height(高度) :

NO.1	
PART NO	L
	X

Main technical specifications:

Rated load(额定负荷):	DC 50V 0.3A		
Contact impedance(接触阻抗):	≤ 100mΩ MAX		
Insulation impedance(绝缘阻抗):	≥ 100MΩ MIN		
TIMING	NON-SHORTING		
OPERATING LIFE (电气寿命):	100,000 cycles		
Usage temperature (使用温度):	-25 to 85		
CIRCUIT	1P5T		
Trip(行程):	2.3 ± 0.2mm		
Operating force(操作力):	1	2	250 ± 100g
	3	4	
	5	6	

public errand (公差) : ±0.2mm unit (单位) : mm

LCZY ELECTRONICS(SHEN ZHEN)CO.,LTD

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		SWITCH		DRAWING	G.L CHEN	DWG.No.	LCZY
PART NO.		SS-15E01		CHECK	Z.LIU	REV.	A1
	UNIT :	TOLERANCE OTHERWISE	UP TO 5 ABOVE 5 ~ 30 ABOVE 30 ANGLE	APPROVAL		DATE	SS-09-2019
	mm		±0.2 ±0.3 ±0.5 ±3°	SCALE	2:1	PAGE	1 OF 1

SS-15E01 - □